

# SEAFLO®

— Make Water Work For You —



Marine Equipment  
Catalog Download



Marine Lighting  
Catalog Download



Ultrasonic Defense System  
Catalog Download

## SEAFLO®

— Make Water Work For You —

### FUJIAN AIDI ELECTRIC CO.,LTD.

Office Add: No.520 Hengtian Road, Business Operation Center in North Station, Jimei District, Xiamen, Fujian, China

Factory Add: F2-4 Block, Industrial Park, Liancheng County, Longyan City, Fujian, China

Tel / WhatsApp / Wechat: + 86 13860382108

Web: [www.seaflo.com](http://www.seaflo.com) [www.seaflomariner.com](http://www.seaflomariner.com)

E-mail: [business@seaflo.com](mailto:business@seaflo.com)



Wechat



Website




WhatsApp

#### ACCURACY AND COMPLETENESS OF INFORMATION

All information in this literature regarding products and services provided by SEAFLO is subject to change without prior notice. Reasonable efforts are taken to ensure the accuracy and integrity of all information provided here, but SEAFLO is not responsible for misprints, out-of-date information, or errors. SEAFLO makes no warranty, express or implied, or assumes any legal liability or responsibility for the accuracy or completeness of any information contained in this literature.



# MARINE LIGHTING

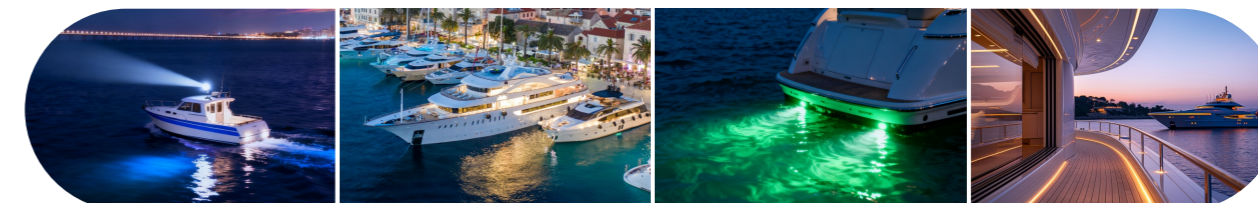

## 2026

MASTER CATALOGUE

[www.seaflo.com](http://www.seaflo.com)

USCG ABYC COLREG 72 ISO8846





|                                 |                                     |                                 |                           |                        |
|---------------------------------|-------------------------------------|---------------------------------|---------------------------|------------------------|
| <b>2008</b><br>Brand Created in | <b>4 Million</b><br>Annual Capacity | <b>160,000</b><br>Square meters | <b>1000+</b><br>Customers | <b>240+</b><br>Patents |
|---------------------------------|-------------------------------------|---------------------------------|---------------------------|------------------------|

SEAFLO group is an ISO 9001, BSCI certified, professional marine & RV integrated accessories solution and outdoor solution provider and manufacturer. We have 3 production bases, 3 modern standard workshops of 50,000 square meters, and more than 200 employees. SEAFLO products and brand is deeply engaged in Marine, RV and outdoor market for more than a decade. We offer professional and reliable service with the cost-effective products of SEAFLO brand and private branding for our partners.

We serve more than 1000 customers in over 100 countries all over the world. We are committed to build a strong and senior technical personnel of research & development team.

We have obtained more than 200 domestic and international patents, and our products have passed CE, UKCA, LFGB, USCG, ABYC, COLREG 72, ROHS, ISO 8846 and ISO 8849, CSA, Reach, PAHs and other international certifications.




**Our Mission:** A community of ordinary people, buiding an extraordinary company with value and warmth.

**Our Vision:** To become a globally influential brand that leads sustainable growth through 2050 and beyond.(2020-2050)











**Our Values:** Time Tests Value. Co-creation Shapes Tomorrow. -Learning, Growing, Giving Thanks, Winning Together.

# CONTENTS




## Searchlight



|   |    |
|---|----|
|  LED Aluminum Searchlight 04/05 Series ..... | 03 |
|  Remote Control LED Searchlights .....       | 05 |
|  Remote Control Halogen Searchlights .....   | 09 |

## Navigation Light


|  |    |
|--|----|
|  LED Multi-Function Sport Lights.....             | 11 |
|  LED Portable Navigation Light Kits .....         | 12 |
|  LED Navigation Lights 03/04 Series .....        | 13 |
|  LED Square Navigation Light 01/02 Series ..... | 15 |
|  Horizontal Mount Lights 05 Series.....         | 17 |
|  Vertical Mount Lights 05/06 Series .....       | 17 |
|  Deck Mounted Navigation Lights.....            | 19 |
|  Vertical Mount Lights 02/04 Series .....       | 20 |
|  Horizontal Mount Lights 02/03/04 Series.....   | 21 |
|  LED Bi-Color Bow Light .....                   | 22 |

## LED All-Round Pole Lights






|   |    |
|---|----|
|  LED All-Round Lights 01 Series.....       | 22 |
|  LED All-Round Lights 02 Series.....       | 24 |
|  LED All-Round Pole Lights 05 Series ..... | 24 |

|   |    |
|---|----|
|  LED All-round Pole Lights 06 Series .....         | 29 |
|  Mounting Base for Plug-in Mount Pole Lights ..... | 31 |
|  LED Bi-color Bow Lights .....                     | 32 |
|  LED All-Round Pole Lights 01/02/03/04 Series..... | 33 |
|  Mounting Base for Pole Lights.....                | 36 |







## Led Underwater Lights


|   |    |
|---|----|
|  Underwater Lights 01/02 Series..... | 38 |
|---|----|

## LED Floodlights

|   |    |
|---|----|
|  LED Floodlights 02/03/04 Series .....        | 41 |
|  Dual Colour LED Floodlights 01 Series ..... | 42 |
|  LED Floodlights 3/6/12 LEDs .....           | 43 |
|  LED Floodlights 07/08 Series .....          | 45 |
|  LED Deck Lights.....                        | 46 |

## Interior Lighting

|   |    |
|---|----|
|  LED Stern Lights 01/02 Series ..... | 47 |
|  LED Strip Lights .....              | 48 |
|  LED Ceiling Lights.....             | 48 |
|  LED Courtesy Lights .....           | 51 |
|  LED Livewell Lights .....           | 52 |
|  LED Reading Lights.....             | 53 |

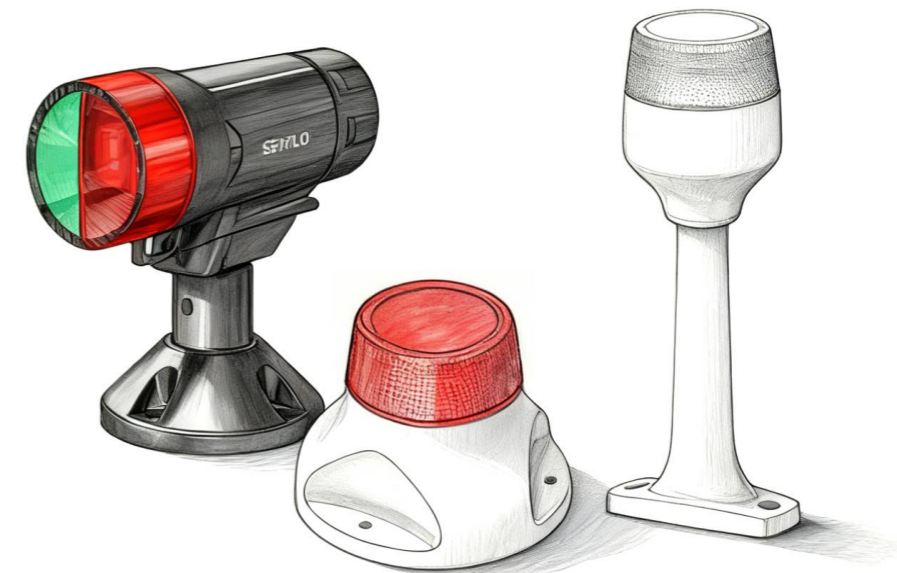

### IMO COLREG 72 Lights and Visibility - Sailboats

IMO COLREG requirements for navigation lighting on powerboats less than 50m (165ft) LOA (Length Overall).  
Note - Sailboats under motor adopt the rules for Powerboats.

**Powerboats up to 7m (23ft).**  
Not capable of more than 7 knots



- 1x All Round White

**Powerboats up to 12m (39.6ft)**  
Where Separate Masthead and Stern cannot be mounted



- 1x Port lamp (2NM)
- 1x Starboard lamp (2NM)
- OR
- 1x Bi-Colour lamp (2NM)
- 1x All Round White lamp (2NM)

**Powerboats up to 12m (39.6ft)**



- 1x Port lamp (2NM)
- 1x Starboard lamp (2NM)
- OR
- 1x Bi-Colour lamp (2NM)
- 1x Masthead lamp (2NM)
- 1x All Round White lamp (2NM) for vessels at anchor
- 1x Stern lamp (2NM)

**Powerboats more than 12m (39.6ft), but less than 20m (66ft)**



- 1x Port lamp (2NM)
- 1x Starboard lamp (2NM)
- OR
- 1x Bi-Colour lamp (2NM)
- 1x Masthead lamp (3NM)
- 1x Stern lamp (2NM)
- 1x All Round White lamp (2NM) for vessels at anchor

**Powerboats more than 20m (66ft), but less than 50m (165ft)**



- 1x Port lamp (2NM)
- 1x Starboard lamp (2NM)
- 1x Masthead lamp (5NM)
- 1x Stern lamp (2NM)
- 1x All Round White lamp (2NM) for vessels at anchor

### IMO COLREG 72 Lights and Visibility - Sailboats

IMO COLREG requirements for navigation lighting on sailboats less than 50m (165ft) LOA (Length Overall).  
Note - Sailboats under motor adopt the rules for Powerboats.

**Sailboats up to 20m (66ft) under sail**



- 1x Tri-Colour lamp (2NM)
- 1x Masthead lamp (3NM)
- 1x All Round White lamp (2NM) for vessels at anchor


**Sailboats more than 20m(66ft) but less than 50m(165ft) under sail**



- 1x Port lamp (2NM)
- 1x Starboard lamp (2NM)
- OR
- 1x Bi-Colour lamp (2NM)
- 1x Stern lamp (2NM)
- 1x Masthead lamp (5NM)
- 1x All Round White lamp (2NM) for vessels at anchor


The following images depict ADDITIONAL lighting requirements for special activities:

**Sailboats and Powerboats grounded**



- 1x All Round White lamp (2NM)
- 2x All Round Red lamp (2NM) Mounted above one another

**Sailboats and Powerboats not under command (NUC)**



- 2x All Round Red lamp (2NM) Mounted above one another

**Sailboats and Powerboats manoeuvring with difficulty (RAM)**



- 1x All Round Red lamp (2NM)
- 1x All Round White lamp (2NM)
- 1x All Round Red lamp (2NM) Mounted above one another

## LED Aluminum Searchlight 05 Series

- IP65 rated
- Precise beam tilt control: 20° up, 20° down, rotation: 360° continuous
- Dual-speed adjustable modes (fast/slow switching)
- Remote control and 15ft / 4.6m cable included
- Equipped with high-efficiency CREE LEDs, providing up to 50,000 operating hours
- Robust die-cast aluminum housing, triple-coated & UV stabilized, fully enclosed design



CREE LED

CREE LED  
high-lumen chips, long-lasting high intensity, stable lighting performance



Beam Distance: 600m



## LED Aluminum Searchlight 04 Series

- IP65 rated
- Precise beam tilt control: 9° up, 17° down,
- Rotation: 360° continuous
- Dual-speed adjustable modes (fast/slow switching)
- Equipped with high-efficiency CREE LEDs, providing up to 50,000 operating hours
- Remote control and 15ft / 4.6m cable included
- Robust die-cast aluminum housing, triple-coated & UV stabilized, fully enclosed design




CREE LED

CREE LED  
high-lumen chips, long-lasting high intensity, stable lighting performance



Beam Distance: 1000m

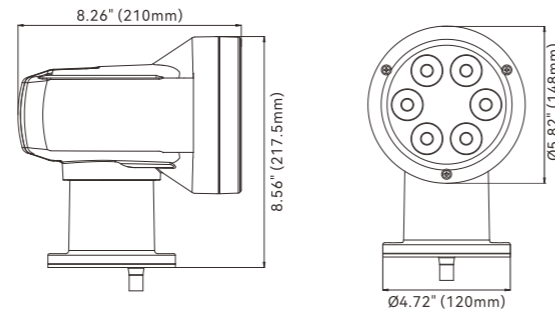

left and right 360° continuous rotation



Built-in elevation rotation structure, Up 20°, Down 20°




Powerful 6-LED array delivers an ultra-bright beam



Three-layer coating protection (Salt Spray, Humidity, Weather Resistance)

| Model            | Control Type    | Voltage | Power | Color Temperature | Luminous Flux | Candlepower | Beam Distance | Housing Material        |
|------------------|-----------------|---------|-------|-------------------|---------------|-------------|---------------|-------------------------|
| SFSL3-2700W-05W  | Wired remote    | 12/24V  | 25W   | 5000K (White)     | 2700 lm       | 100000 cd   | 600m          | Die-cast aluminum alloy |
| SFSL3-2700W-05WA | Wireless remote |         |       |                   |               |             |               |                         |

Up and down 40° rotation, left and right 360° continuous rotation

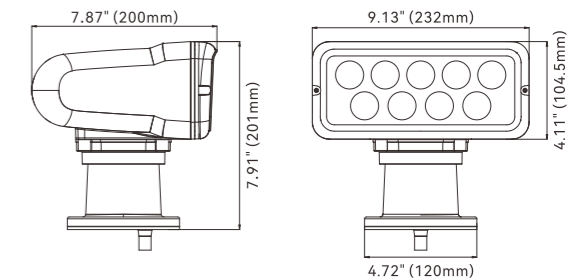

left and right 360° continuous rotation



Built-in elevation rotation structure, Up 9°, Down 17°



Powerful 9-LED array delivers an ultra-bright beam



Three-layer coating protection (Salt Spray, Humidity, Weather Resistance)

| Model            | Control Type    | Voltage | Power | Color Temperature | Luminous Flux | Candlepower | Beam Distance | Housing Material        |
|------------------|-----------------|---------|-------|-------------------|---------------|-------------|---------------|-------------------------|
| SFSL3-3000W-04W  | Wired remote    | 12/24V  | 36W   | 5000K (White)     | 3000 lm       | 220000 cd   | 1000m         | Die-cast aluminum alloy |
| SFSL3-3000W-04WA | Wireless remote |         |       |                   |               |             |               |                         |

Up 9° and down 17° rotation, left and right 360° continuous rotation



**SEOUL**  
**SEOUL LED**  
 delivers high lumen output, high current operation capability, and stable, long-lasting performance.

## Remote Control LED Searchlight

SEAFLO searchlights can perform omnidirectional, multi-angle, and long-distance lighting tasks. They can rotate 360 degrees horizontally and 60 degrees vertically. Equipped with a remote control and multifunction settings for user convenience, these searchlights are ideal for mariners locating buoys, moorings, channel markers, and more.

### FEATURES & BENEFITS



- 360° horizontal rotation
- 60° vertical sweep
- 2700lm super bright LED light source
- 300-400 meters beam distance
- IP65 waterproof rating
- Remote control and 15ft / 4.6m cable included
- ASA material, corrosion-resistant, oxidation-resistant
- Long service life
- Easy installation
- ISO 8846 / SAE J1171 Compliant
- Use the home button to instantly reset to the original installed position



White light




Warm light

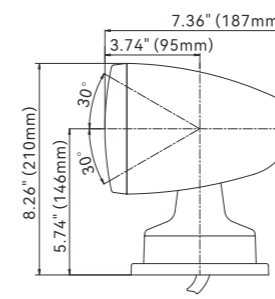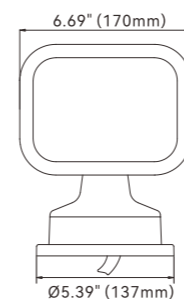


| Model          | Control Type    | Voltage | Power | Brightness | Housing Color | Color Temperature |
|----------------|-----------------|---------|-------|------------|---------------|-------------------|
| SFSL-2700W-01W | Wired remote    | 10-30V  | 28W   | 2700Lumen  | White         | White light 5500K |
| SFSL-2700Y-01W |                 |         |       |            |               | Warm light 2700K  |
| SFSL-2700W-01B |                 |         |       |            | Black         | White light 5500K |
| SFSL-2700Y-01B |                 |         |       |            |               | Warm light 2700K  |
| SFSL-2700W-02W | Wireless remote | 10-30V  | 28W   | 2700Lumen  | White         | White light 5500K |
| SFSL-2700Y-02W |                 |         |       |            |               | Warm light 2700K  |
| SFSL-2700W-02B |                 |         |       |            | Black         | White light 5500K |
| SFSL-2700Y-02B |                 |         |       |            |               | Warm light 2700K  |

Up and down 60° rotation, left and right 360° rotation

### Remote Control Button Functions

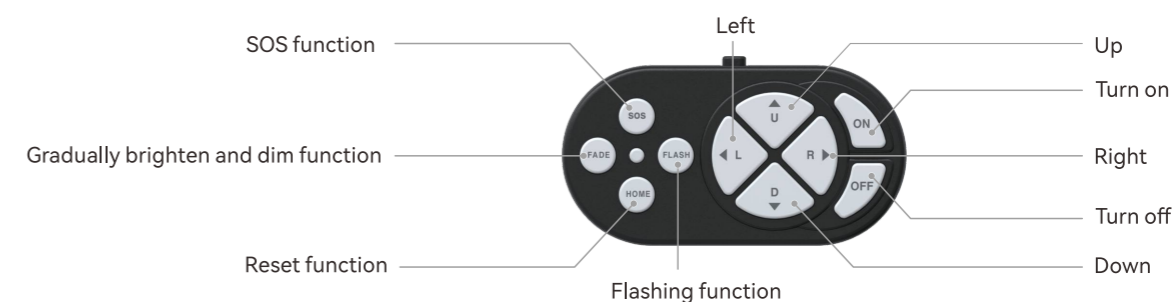

**SEOUL**  
**SEOUL LED**  
 delivers high lumen output, high current operation capability, and stable, long-lasting performance.

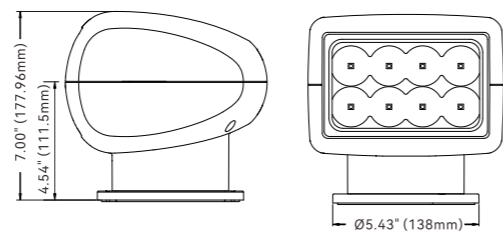

## Remote Control LED Searchlight

SEAFLO searchlights can perform omnidirectional, multi-angle, and long-distance lighting tasks. They can rotate 360° horizontally and 60° or 75° vertically. Equipped with a remote control for user convenience, they are ideal for mariners to locate buoys, moorings, and channel markers. They are also perfect for large motorhomes and buses to pinpoint road signs, campsites, or serve as backup lighting.

### FEATURES & BENEFITS


- 360° horizontal rotation
- 60° or 75° vertical sweep
- Super bright LED light source
- 600-1200 meters beam distance
- IP65 waterproof rating

- Remote control and 15ft / 4.6m cable included
- Corrosion-resistant, oxidation-resistant material
- Long service life
- Easy installation




| Model            | Control Type    | Voltage | Power | Candlepower | Housing Color | Color Temperature | Beam Distance |
|------------------|-----------------|---------|-------|-------------|---------------|-------------------|---------------|
| SFSL3-2000W-01W  | Wired remote    | 10-30V  | 25W   | 125000 cd   | White         | White light 5500K | 1968' / 600m  |
| SFSL3-2000Y-01W  |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-2000W-01B  |                 |         |       |             | Black         | White light 5500K |               |
| SFSL3-2000Y-01B  |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-2000W-01WA | Wireless remote | 10-30V  | 25W   | 125000 cd   | White         | White light 5500K | 1968' / 600m  |
| SFSL3-2000Y-01WA |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-2000W-01BA |                 |         |       |             | Black         | White light 5500K |               |
| SFSL3-2000Y-01BA |                 |         |       |             |               | Warm light 3000K  |               |

Up and down 75° rotation, left and right 360° rotation

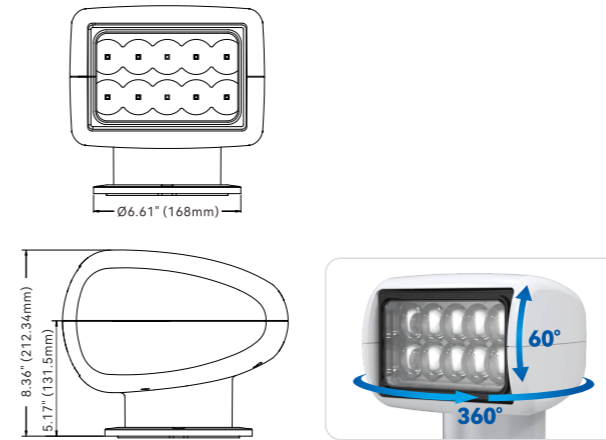

| Model            | Control Type    | Voltage | Power | Candlepower | Housing Color | Color Temperature | Beam Distance |
|------------------|-----------------|---------|-------|-------------|---------------|-------------------|---------------|
| SFSL3-2700W-02W  | Wired remote    | 10-30V  | 30W   | 180000 cd   | White         | White light 5500K | 2624' / 800m  |
| SFSL3-2700Y-02W  |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-2700W-02B  |                 |         |       |             | Black         | White light 5500K |               |
| SFSL3-2700Y-02B  |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-2700W-02WA | Wireless remote | 10-30V  | 30W   | 180000 cd   | White         | White light 5500K | 2624' / 800m  |
| SFSL3-2700Y-02WA |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-2700W-02BA |                 |         |       |             | Black         | White light 5500K |               |
| SFSL3-2700Y-02BA |                 |         |       |             |               | Warm light 3000K  |               |

Up and down 60° rotation, left and right 360° rotation

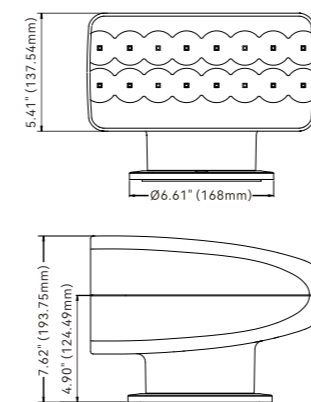

| Model            | Control Type    | Voltage | Power | Candlepower | Housing Color | Color Temperature | Beam Distance |
|------------------|-----------------|---------|-------|-------------|---------------|-------------------|---------------|
| SFSL3-3500W-03W  | Wired remote    | 10-30V  | 35W   | 230000 cd   | White         | White light 5500K | 3937' / 1200m |
| SFSL3-3500Y-03W  |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-3500W-03B  |                 |         |       |             | Black         | White light 5500K |               |
| SFSL3-3500Y-03B  |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-3500W-03WA | Wireless remote | 10-30V  | 35W   | 230000 cd   | White         | White light 5500K | 3937' / 1200m |
| SFSL3-3500Y-03WA |                 |         |       |             |               | Warm light 3000K  |               |
| SFSL3-3500W-03BA |                 |         |       |             | Black         | White light 5500K |               |
| SFSL3-3500Y-03BA |                 |         |       |             |               | Warm light 3000K  |               |

Up and down 60° rotation, left and right 360° rotation



## Remote Control Halogen Searchlight

SEAFLO searchlights can perform omnidirectional, multi-angle, and long-distance lighting tasks. They can rotate 360° horizontally and 60° or 75° vertically. Equipped with a remote control for user convenience, they are ideal for mariners to locate buoys, moorings, and channel markers. They are also perfect for large motorhomes and buses to pinpoint road signs, campsites, or serve as backup lighting.

### FEATURES & BENEFITS

360° horizontal rotation

60° or 75° vertical sweep

260 - 420 meters beam distance

IP65 waterproof rating


High output halogen sealed beam lamp

Remote control and 15ft / 4.6m cable included

Corrosion-resistant, oxidation-resistant material


Long service life

Easy installation

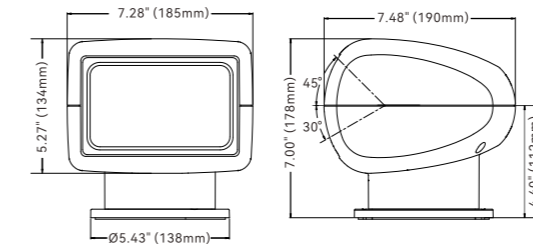


| Model        | Voltage | Amps | Housing Color | Power | Candlepower | Beam Distance |
|--------------|---------|------|---------------|-------|-------------|---------------|
| SFSL1-50-01W | 12V     | 3.6A | White         | 50W   | 100000 cd   | 859' / 262m   |
| SFSL2-50-01W | 24V     | 2A   |               |       |             |               |
| SFSL1-50-01B | 12V     | 3.6A | Black         |       |             |               |
| SFSL2-50-01B | 24V     | 2A   |               |       |             |               |

Up and down 75° rotation, left and right 360° rotation

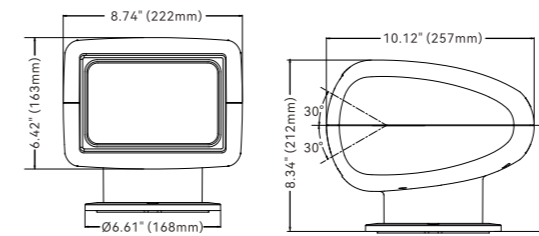

| Model        | Voltage | Amps | Housing Color | Power | Candlepower | Beam Distance |
|--------------|---------|------|---------------|-------|-------------|---------------|
| SFSL1-50-02W | 12V     | 3.6A | White         | 50W   | 175000 cd   | 1266' / 386m  |
| SFSL2-50-02W | 24V     | 2A   |               |       |             |               |
| SFSL1-50-02B | 12V     | 3.6A | Black         |       |             |               |
| SFSL2-50-02B | 24V     | 2A   |               |       |             |               |

Up and down 60° rotation, left and right 360° rotation

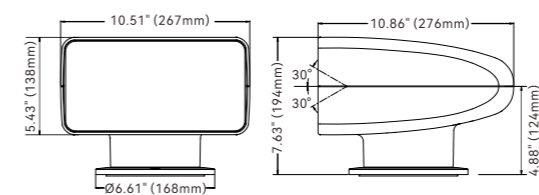

| Model         | Voltage | Amps | Housing Color | Power | Candlepower | Beam Distance |
|---------------|---------|------|---------------|-------|-------------|---------------|
| SFSL1-100-03W | 12V     | 7.2A | White         | 100W  | 200000 cd   | 1377' / 420m  |
| SFSL2-100-03W | 24V     | 4A   |               |       |             |               |
| SFSL1-100-03B | 12V     | 7.2A | Black         |       |             |               |
| SFSL2-100-03B | 24V     | 4A   |               |       |             |               |

Up and down 60° rotation, left and right 360° rotation



### LED Multi-Function Sport Light

Features red light (for night vision), ultraviolet (UV) light (for lures), and white light (for nighttime illumination)  
 360° horizontal rotation, 180° vertical rotation  
 IP65 waterproof rating  
 ABS+PC material, anti-oxidation, anti-impact, anti-corrosion  
 Includes versatile mount for boat or shore use  
 Powered by six AA batteries (not included).  
 Multi-purpose light ideal for fishing, boating, hunting, camping and more.




360° horizontal rotation



lighting effect


- White
- Red
- Blue

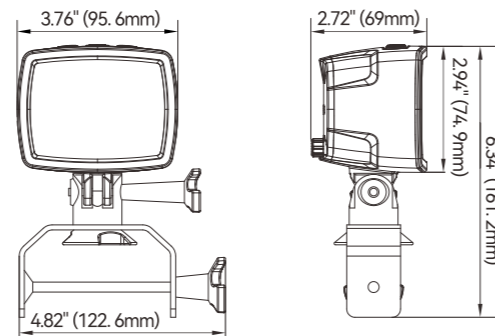

| Model     | Voltage | Amps | Power | Rotation Angle  |
|-----------|---------|------|-------|---|
| SFMSL2-01 | 9V      | 0.6A | 5.3W  | Up and down 180° rotation, left and right 360° rotation |

### LED Portable Navigation Light Kit

Includes red/green bow LED light and white all-round LED light for small boats/tenders  
 IP65 waterproof rating  
 Powered by three AAA batteries (not included)  
 Button switch for easy operation  
 ABS+PC material, anti-oxidation, impact resistance, and corrosion resistance

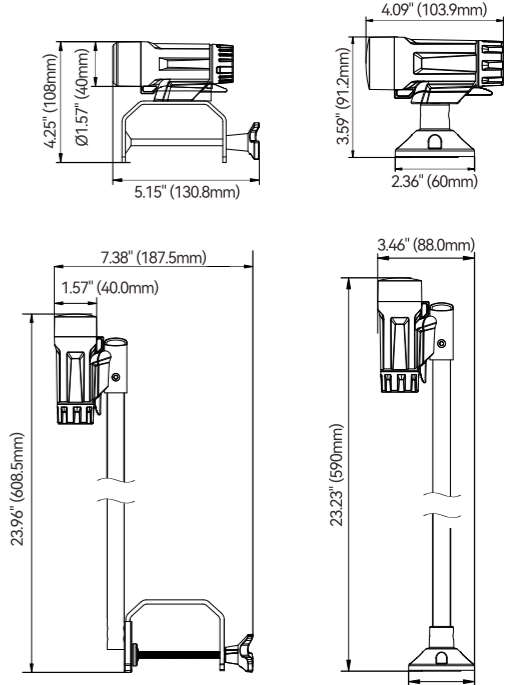

Navigation Light



| Model     | Voltage | Amps  | Power | Visibility | Package includes   |
|-----------|---------|-------|-------|------------|--|
| SFPNL2-01 | 4.5V    | 0.15A | 0.7W  | 2NM        | Bi-color bow light, Stern light, C-clamp*2, Screws*2     |
| SFPNL2-02 |         |       |       |            | Bi-color bow light, Stern light, Suction Cup*2, Screws*2 |
| SFPNL2-08 | 4.5V    | 0.15A | 0.7W  | 2NM        | Bi-color bow light, C-clamp, Suction Cup, Screws*2       |
| SFPNL2-09 |         |       |       |            | Stern light, C-clamp, Suction Cup, Screws*2              |

## LED Navigation Lights 03 Series (Mini)



Blister



LED Bi-Color Bow Light 225°

Ultrasonic welding process used to enhance sealing performance



High-efficiency LED lights with low energy consumption and long lifespan



LED Red Port Light 112.5°

High brightness and strong light penetration



LED Green Starboard Light 112.5°



Modular design with a simple structure




LED White Masthead light 225°

Four pry positions for easy disassembly



LED White Stern Light 135°

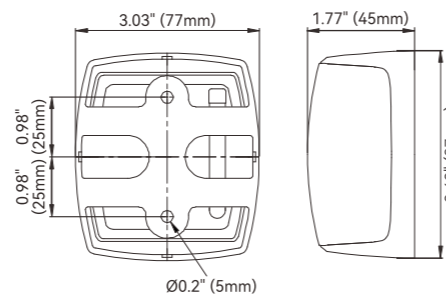

| Model         | Voltage | Wattage | Angle  | Housing color | Lamp color    | Visibility |
|---------------|---------|---------|--------|---------------|---------------|------------|
| SFNL013-PW-03 | 10-30V  | 1.5W    | 112.5° | White         | Red and Green | 2NM        |
| SFNL013-PB-03 |         |         |        | Black         |               |            |
| SFNL013-SW-03 | 10-30V  | 1.5W    | 135°   | White         | White         | 3NM        |
| SFNL013-SB-03 |         |         |        | Black         |               |            |
| SFNL013-MW-03 | 10-30V  | 1.5W    | 225°   | White         | White         | 2NM        |
| SFNL013-MB-03 |         |         |        | Black         |               |            |
| SFNL013-LW-03 | 10-30V  | 1.5W    | 112.5° | White         | Red           | 2NM        |
| SFNL013-LB-03 |         |         |        | Black         |               |            |
| SFNL013-RW-03 | 10-30V  | 1.5W    | 112.5° | White         | Green         | 2NM        |
| SFNL013-RB-03 |         |         |        | Black         |               |            |
| SFNL013-BW-03 | 10-30V  | 1.5W    | 225°   | White         | Bi-Color      | 2NM        |
| SFNL013-BB-03 |         |         |        | Black         |               |            |


## LED Navigation Lights 04 Series (Regular)



SFNL013-PW-04



SFNL013-PB-04

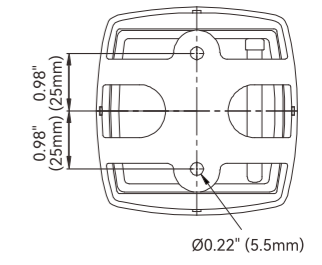

LED Red Port and Green Starboard Lights, 112.5° Each, Pair



SFNL013-MW-04

SFNL013-MB-04


LED White Masthead light 225°



SFNL013-SW-04

SFNL013-SB-04


LED White Stern Light 135°

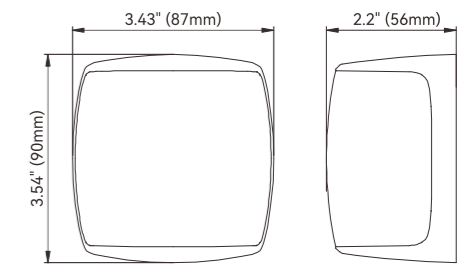

SFNL013-LW-04

SFNL013-LB-04

LED Red Port Light 112.5°

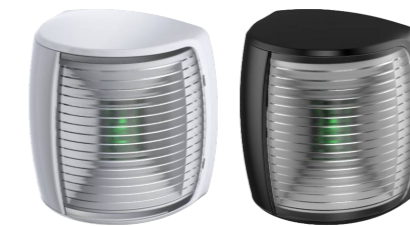

SFNL013-RW-04

SFNL013-RB-04

LED Green Starboard Light 112.5°



SFNL013-BW-04

SFNL013-BB-04

LED Bi-Color Bow Light 225°


| Model         | Voltage | Wattage | Angle  | Housing color | Lamp color    | Visibility |
|---------------|---------|---------|--------|---------------|---------------|------------|
| SFNL013-PW-04 | 10-30V  | 1.5W    | 112.5° | White         | Red and Green | 2NM        |
| SFNL013-PB-04 |         |         |        | Black         |               |            |
| SFNL013-SW-04 | 10-30V  | 1.5W    | 135°   | White         | White         | 3NM        |
| SFNL013-SB-04 |         |         |        | Black         |               |            |
| SFNL013-MW-04 | 10-30V  | 1.5W    | 225°   | White         | White         | 2NM        |
| SFNL013-MB-04 |         |         |        | Black         |               |            |
| SFNL013-LW-04 | 10-30V  | 1.5W    | 112.5° | White         | Red           | 2NM        |
| SFNL013-LB-04 |         |         |        | Black         |               |            |
| SFNL013-RW-04 | 10-30V  | 1.5W    | 112.5° | White         | Green         | 2NM        |
| SFNL013-RB-04 |         |         |        | Black         |               |            |
| SFNL013-BW-04 | 10-30V  | 1.5W    | 225°   | White         | Bi-Color      | 2NM        |
| SFNL013-BB-04 |         |         |        | Black         |               |            |

## LED Square Navigation Light 01 Series (Mini)

SEAFLO boat navigation lights adopt advanced LED technology, which is energy-efficient, has low power consumption, and offers a long service life, improving the safety of night navigation. They are suitable for boats with a length of less than 20 meters for night navigation and signaling.

### FEATURES & BENEFITS

- IP67 waterproof design
- Visible distance 2 nautical miles
- For boats up to 65.6 ft (20 m)
- UV resistant and corrosion resistant
- Low energy consumption and long lifespan
- High brightness and strong penetration
- Simple installation
- Super lightweight and convenient
- USCG Approval 33 CFR 183.810
- ABYC A-16, ABYC C-5, 72 COLREG Approval

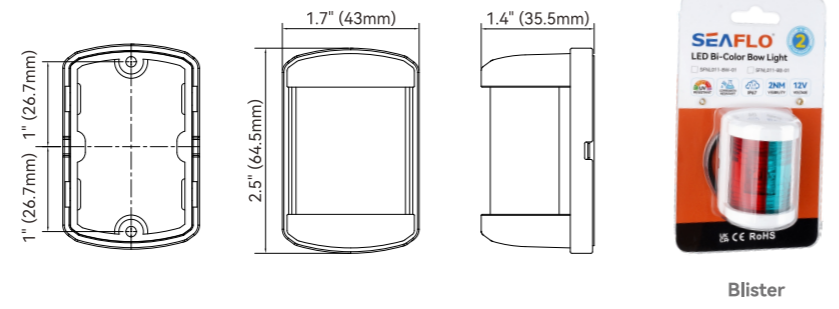


| Model         | Voltage | Wattage | Angle  | Housing color | Lamp color    | Visibility |
|---------------|---------|---------|--------|---------------|---------------|------------|
| SFNL011-PW-01 | 12V     | 1W      | 112.5° | White         | Green and Red | 2NM        |
| SFNL011-PB-01 |         |         |        | Black         |               |            |
| SFNL011-SW-01 | 12V     | 1W      | 135°   | White         | White         | 2NM        |
| SFNL011-SB-01 |         |         |        | Black         |               |            |
| SFNL011-MW-01 | 12V     | 1W      | 225°   | White         | White         | 2NM        |
| SFNL011-MB-01 |         |         |        | Black         |               |            |
| SFNL011-RW-01 | 12V     | 1W      | 112.5° | White         | Green         | 2NM        |
| SFNL011-RB-01 |         |         |        | Black         |               |            |
| SFNL011-LW-01 | 12V     | 1W      | 112.5° | White         | Red           | 2NM        |
| SFNL011-LB-01 |         |         |        | Black         |               |            |
| SFNL011-BW-01 | 12V     | 1W      | 225°   | White         | Bi-Color      | 2NM        |
| SFNL011-BB-01 |         |         |        | Black         |               |            |

## LED Square Navigation Light 02 Series (Regular)



| Model         | Voltage | Wattage | Angle  | Housing color | Lamp color    | Visibility |
|---------------|---------|---------|--------|---------------|---------------|------------|
| SFNL011-PW-02 | 12V     | 1W      | 112.5° | White         | Green and Red | 2NM        |
| SFNL011-PB-02 |         |         |        | Black         |               |            |
| SFNL011-SW-02 | 12V     | 1W      | 135°   | White         | White         | 2NM        |
| SFNL011-SB-02 |         |         |        | Black         |               |            |
| SFNL011-MW-02 | 12V     | 1W      | 225°   | White         | White         | 2NM        |
| SFNL011-MB-02 |         |         |        | Black         |               |            |
| SFNL011-RW-02 | 12V     | 1W      | 112.5° | White         | Green         | 2NM        |
| SFNL011-RB-02 |         |         |        | Black         |               |            |
| SFNL011-LW-02 | 12V     | 1W      | 112.5° | White         | Red           | 2NM        |
| SFNL011-LB-02 |         |         |        | Black         |               |            |
| SFNL011-BW-02 | 12V     | 1W      | 225°   | White         | Bi-Color      | 2NM        |
| SFNL011-BB-02 |         |         |        | Black         |               |            |


## Horizontal Mount Lights 05 Series

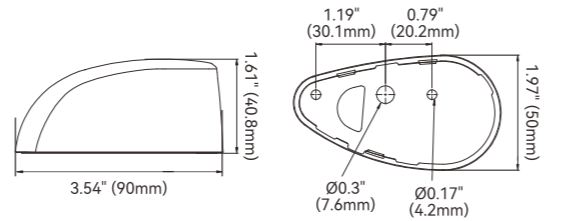

SFNL033-LW-05 LED Red Port Light 112.5°  
 SFNL033-RW-05 LED Green Starboard Light 112.5°  
 SFNL033-PW-05 LED Port and Starboard Lights (Pair)

| Model         | Voltage | Wattage | Angle  | Lamp color  | Visibility | Material |
|---------------|---------|---------|--------|-------------|------------|----------|
| SFNL033-LW-05 | 10-30V  | 1.5W    | 112.5° | Red         | 2NM        | ASA,PC   |
| SFNL033-RW-05 |         |         |        | Green       |            |          |
| SFNL033-PW-05 | 10-30V  | 1.5W    | 112.5° | Red & Green | 2NM        | ASA,PC   |

## Vertical Mount Lights 06 Series


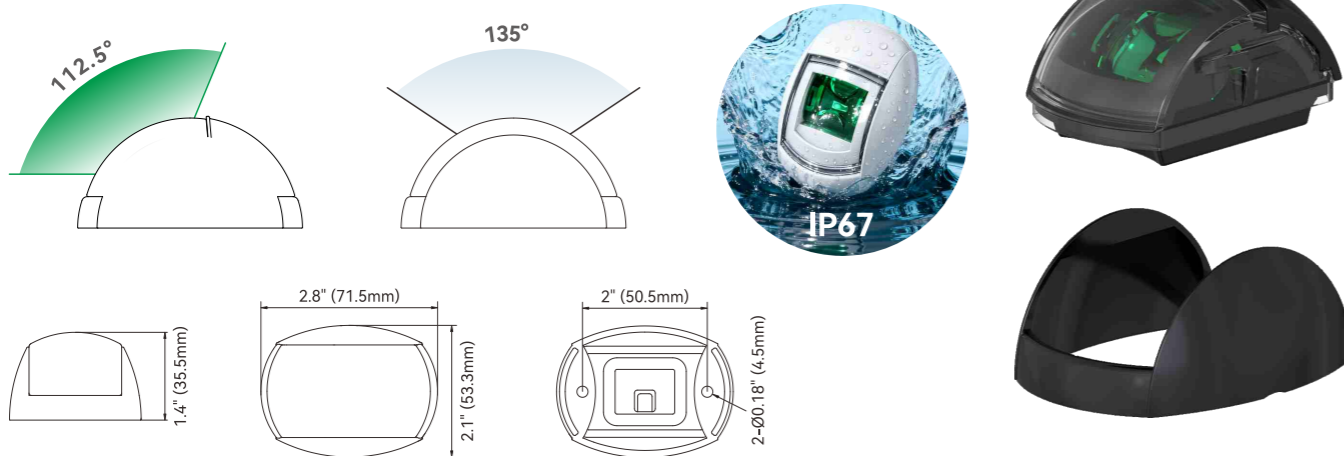


SFNL023-SW-06 LED White Stern Light 135°  
 SFNL023-SB-06 LED White Stern Light 135°  
 SFNL023-PW-06 LED Port and Starboard Lights (Pair)  
 SFNL023-PB-06 LED Port and Starboard Lights (Pair)


| Model         | Voltage | Wattage | Angle  | Housing color | Lamp color  | Visibility | Material |
|---------------|---------|---------|--------|---------------|-------------|------------|----------|
| SFNL023-SW-06 | 10-30V  | 1.5W    | 135°   | White         | White       | 3NM        | ASA, PC  |
| SFNL023-SB-06 |         |         |        | Black         |             |            |          |
| SFNL023-PW-06 | 10-30V  | 1.5W    | 112.5° | White         | Red & Green | 2NM        | ASA, PC  |
| SFNL023-PB-06 |         |         |        | Black         |             |            |          |

## Vertical Mount Lights 05 Series

SEAFLO boat navigation lights incorporate advanced LED technology, characterized by its energy efficiency, minimal power consumption, and extended service life, thereby enhancing the safety of nighttime navigation. These lights are ideally suited for vessels with a length of less than 20 meters, facilitating night navigation and signaling.

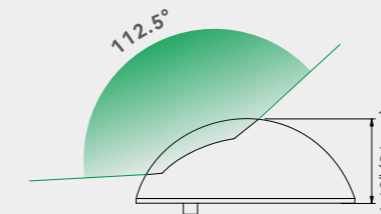

Navigation Light

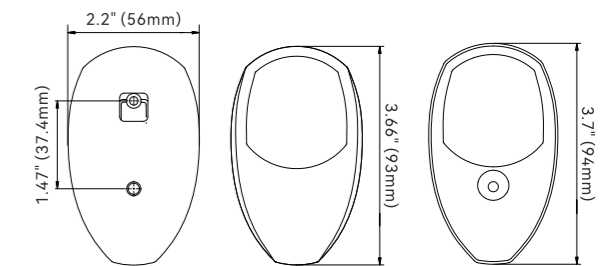

SFNL023-PS-05 LED Red Port Light and Green Starboard Light 112.5°, Pair  
 SFNL023-PW-05 LED Red Port Light and Green Starboard Light 112.5°, Pair  
 SFNL023-PB-05 LED Red Port Light and Green Starboard Light 112.5°, Pair

| Model         | Voltage | Wattage | Angle  | Housing color | Lamp color  | Visibility | Material       |
|---------------|---------|---------|--------|---------------|-------------|------------|----------------|
| SFNL023-PW-05 | 10-30V  | 2W      | 112.5° | White         | Red & Green | 2NM        | ASA,PC         |
| SFNL023-PB-05 |         |         |        | Black         |             |            | ASA,PC         |
| SFNL023-PS-05 |         |         |        | S.S.316       |             |            | ASA,PC,S.S.316 |

## Deck Mounted Navigation Lights

For boats up to 65.6 ft (20 m)  
USCG Approval 33 CFR 183.810  
ABYC A-16, ABYC C-5, 72 COLREG Approval



Blister

316 stainless steel housing, impact-resistant and seawater corrosion-resistant



LED Bi-Color Bow Light 225° (Horizontal Mount)

High-efficiency LED lights with low energy consumption and long lifespan

High brightness and strong light penetration



LED Red Port Light 112.5° (Horizontal Mount)



LED Green Starboard Light 112.5° (Horizontal Mount)

IP67 waterproof, sealed for harsh conditions




LED Red Port Light 112.5° (Vertical Mount)


Super lightweight and easy to install



LED Green Starboard Light 112.5° (Vertical Mount)

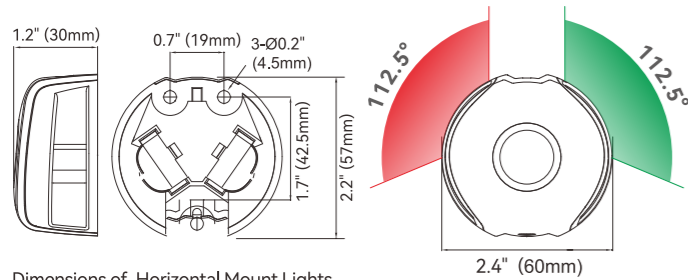

Dimensions of Horizontal Mount Lights

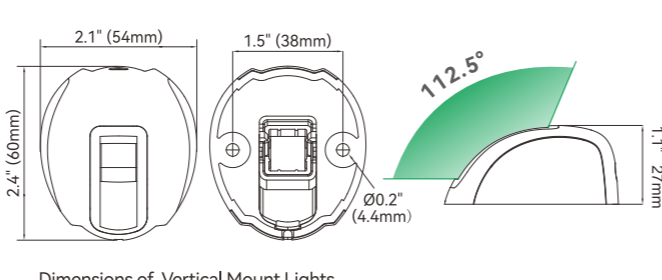


Dimensions of Vertical Mount Lights

| Model         | Color       | Voltage | Power | Angle  | Visibility | Installation     |
|---------------|-------------|---------|-------|--------|------------|------------------|
| SFNL031-LS-01 | Red         | 12V     | 1W    | 112.5° | 2NM        | Horizontal Mount |
| SFNL031-RS-01 | Green       |         |       |        |            |                  |
| SFNL031-PS-01 | Red & Green |         |       |        |            |                  |
| SFNL031-BS-01 | Bi-Color    | 12V     | 1W    | 225°   | 2NM        |                  |
| SFNL021-LS-01 | Red         | 12V     | 1W    | 112.5° | 2NM        | Vertical Mount   |
| SFNL021-RS-01 | Green       |         |       |        |            |                  |
| SFNL021-PS-01 | Red & Green |         |       |        |            |                  |

## Vertical Mount Lights 04 Series



Blister

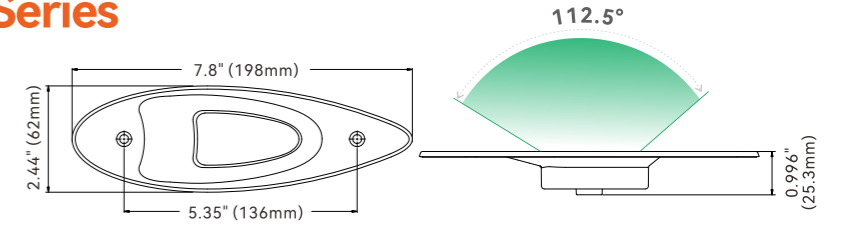

LED Red Port Light 112.5°




LED Green Starboard Light 112.5°



| Model         | Voltage | Wattage | Angle  | Lamp color  | Visibility | Material            |
|---------------|---------|---------|--------|-------------|------------|---------------------|
| SFNL021-LS-04 | 10-30V  | 2W      | 112.5° | Red         | 2NM        | Stainless Steel 316 |
| SFNL021-RS-04 |         |         |        | Green       |            |                     |
| SFNL021-PS-04 |         |         |        | Red & Green |            |                     |

## Vertical Mount Lights 02 Series

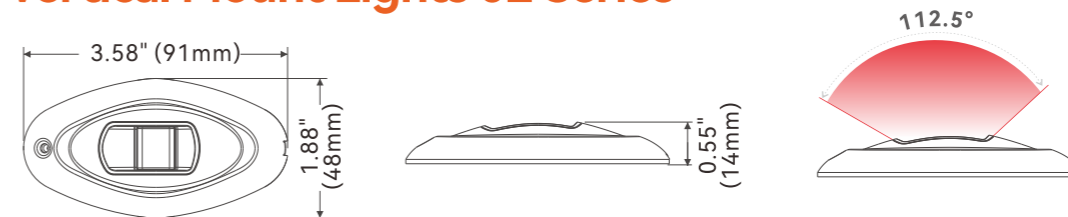

SFNL021-LS-04  
LED Red Port Light 112.5°



SFNL021-RS-04  
LED Green Starboard Light 112.5°




SFNL021-PS-04  
LED Red Port and Green Starboard Lights,  
112.5° Each, Pair



Blister

| Model         | Voltage | Wattage | Angle  | Lamp color  | Visibility | Material            |
|---------------|---------|---------|--------|-------------|------------|---------------------|
| SFNL021-LS-02 | 12V     | 1W      | 112.5° | Red         | 1NM        | Stainless Steel 316 |
| SFNL021-RS-02 |         |         |        | Green       |            |                     |
| SFNL021-PS-02 |         |         |        | Red & Green |            |                     |


### Horizontal Mount Lights 02 Series

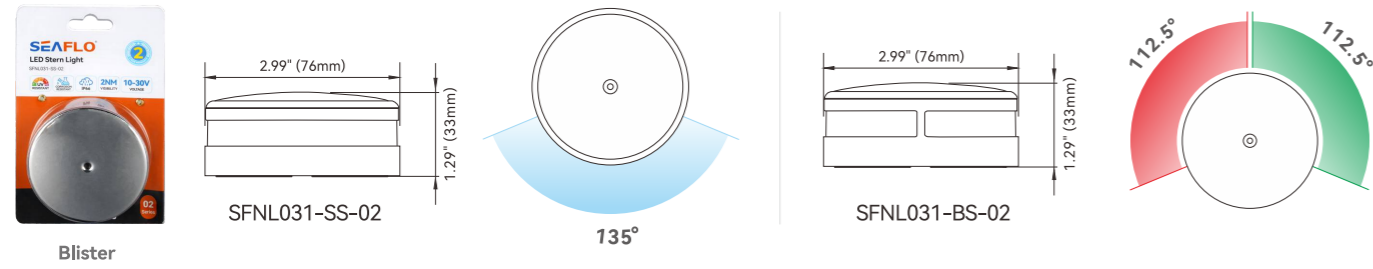

SFNL031-SS-02 LED White Stern Light 135°  
 SFNL031-MS-02 LED White Masthead Light 225°  
 SFNL031-BS-02 LED Bi-Color Bow Light 225°

| Model         | Color    | Voltage | Wattage | Angle | Visibility | Material        |
|---------------|----------|---------|---------|-------|------------|-----------------|
| SFNL031-SS-02 | White    | 10-30V  | 1.7W    | 135°  | 2NM        | Stainless Steel |
| SFNL031-MS-02 | White    |         |         | 225°  |            |                 |
| SFNL031-BS-02 | Bi-Color | 10-30V  | 1.7W    | 225°  | 2NM        | Stainless Steel |

### Horizontal Mount Lights 03 Series

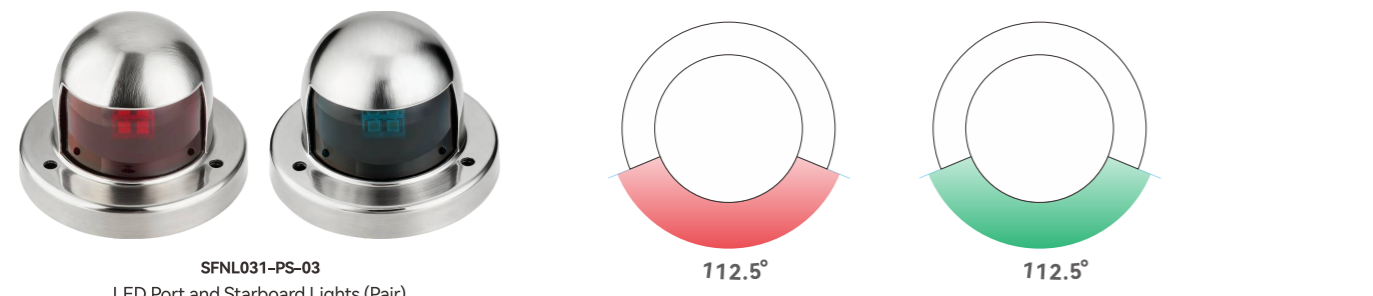

SFNL031-PS-03 LED Port and Starboard Lights (Pair)  
 SFNL031-LS-03 LED Red Port Light 112.5°  
 SFNL031-RS-03 LED Green Starboard Light 112.5°

| Model         | Voltage | Wattage | Angle  | Lamp color  | Visibility | Material             |
|---------------|---------|---------|--------|-------------|------------|----------------------|
| SFNL031-LS-03 | 12V     | 1.5W    | 112.5° | Red         | 1NM        | S.S. 316 and PC base |
| SFNL031-RS-03 |         |         |        | Green       |            |                      |
| SFNL031-PS-03 |         |         |        | Red & Green |            |                      |

### Horizontal Mount Lights 04 Series



| Model         | Color       | Voltage | Wattage | Angle  | Visibility | Material            |
|---------------|-------------|---------|---------|--------|------------|---------------------|
| SFNL031-LS-04 | Red         | 12V     | 1W      | 112.5° | 2NM        | Stainless Steel 316 |
| SFNL031-RS-04 | Green       |         |         |        |            |                     |
| SFNL031-PS-04 | Red & Green | 12V     | 1W      | 112.5° | 2NM        | Stainless Steel 316 |
| SFNL031-BS-04 | Bi-Color    | 12V     | 1W      | 225°   | 2NM        | Stainless Steel 316 |

### LED Bi-Color Bow Light



| Model       | Voltage | Wattage | Angle | Lamp color | Visibility | Material            |
|-------------|---------|---------|-------|------------|------------|---------------------|
| SFNL051-01S | 12V     | 0.7W    | 225°  | Bi-Color   | 1NM        | Chrome-plated zinc  |
| SFNL053-01S | 10-30V  | 2W      |       |            | 2NM        | Stainless Steel 316 |

### LED All-Round Lights 01 Series



| Model         | Voltage | Wattage | Angle | Lamp color | Certificate | Material |
|---------------|---------|---------|-------|------------|-------------|----------|
| SFNL073-WB-01 | 10-30V  | 3W      | 360°  | White      | USCG 3NM    | Plastic  |
| SFNL073-GB-01 |         |         |       | Green      | USCG 2NM    |          |
| SFNL073-RB-01 |         |         |       | Red        | USCG 2NM    |          |


## LED All-Round Pole Lights

SEAFLO All-Round LED Nav lights offer outstanding durability and longevity while sipping battery power. This versatile light combines 2-mile or 3-mile, 360° light visibility for boats up to 65.6ft (20m) with adjust ability. Pole fits most popular bases (can be sold separately).

USCG, ABYC C-5, 72 COLREG Approval



## LED All-Round Lights 02 Series

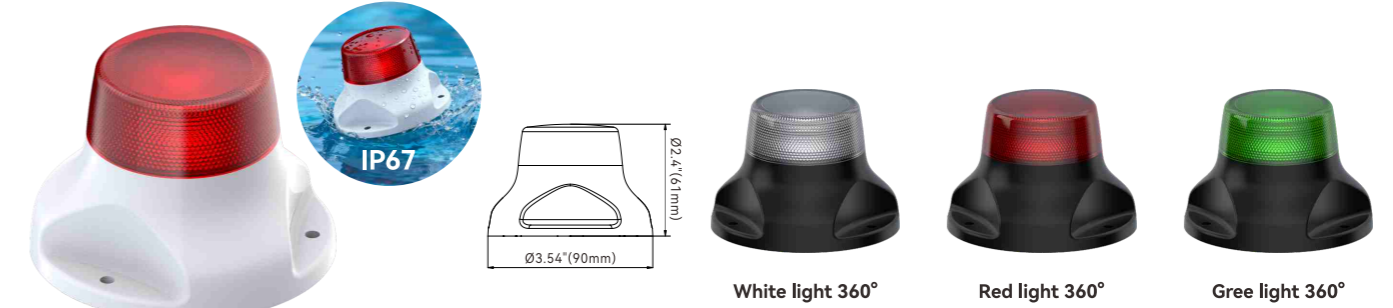

| Overall Length | 2.4" (61mm)   | 2.4" (61mm)   | 2.4" (61mm)   | 2.4" (61mm)   | 2.4" (61mm)   | 2.4" (61mm)   |
|----------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Model          | SFNL073-WB-02 | SFNL073-RB-02 | SFNL073-GB-02 | SFNL073-WW-02 | SFNL073-RW-02 | SFNL073-GW-02 |
| Voltage        | 10-30V        | 10-30V        | 10-30V        | 10-30V        | 10-30V        | 10-30V        |
| Visibility     | 2NM           | 2NM           | 2NM           | 2NM           | 2NM           | 2NM           |
| Wattage        | 1.5W          | 1.5W          | 1.5W          | 1.5W          | 1.5W          | 1.5W          |
| Lighting color | White 360°    | Red 360°      | Green 360°    | White 360°    | Red 360°      | Green 360°    |
| Housing color  | Black         | Black         | Black         | White         | White         | White         |
| Material       | ASA,PC        |               |               |               |               |               |

## LED All-Round Pole Lights 05 Series (Fixed mount)



| Overall Length    | 2.15"(54.5mm)        |               | 6"(152mm)            |               | 8"(205mm)                  |               |
|-------------------|----------------------|---------------|----------------------|---------------|----------------------------|---------------|
| Model             | SFNL083-2-05B        | SFNL083-2-05W | SFNL083-6-05B        | SFNL083-6-05W | SFNL083-8-05B              | SFNL083-8-05W |
| Voltage           | 10-30V               | 10-30V        | 10-30V               | 10-30V        | 10-30V                     | 10-30V        |
| Visibility        | 2NM                  | 2NM           | 2NM                  | 2NM           | 2NM                        | 2NM           |
| Wattage           | 1.5W                 | 1.5W          | 1.5W                 | 1.5W          | 1.5W                       | 1.5W          |
| Housing Color     | Black                | White         | Black                | White         | Black                      | White         |
| Color Temperature | Daylight white 5700K |               | Daylight white 5700K |               | Daylight white 5700K       |               |
| Base Type         | Surface mount        |               | Fixed mount          |               | Fixed mount                |               |
| Material          | ASA,PC               |               | ASA,PC               |               | ASA,PC,316 stainless steel |               |

## LED All-Round Pole Lights 05 Series (Adjustable Mount)

### Plastic Base



| Overall Length    | 8"(205mm)            |                 | 12"(315mm)           |                 | 20"(510mm)           |                 |
|-------------------|----------------------|-----------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-8A-05BP      | SFNL083-8A-05WP | SFNL083-12-05BP      | SFNL083-12-05WP | SFNL083-20-05BP      | SFNL083-20-05WP |
| Voltage           | 10-30V               |                 | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                 | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                 | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Adjustable mount     |                 | Adjustable mount     |                 | Adjustable mount     |                 |
| Color Temperature | Daylight white 5700K |                 | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing   | Black housing        | White housing   | Black housing        | White housing   |

### 316 Stainless Steel Base



| Overall Length    | 8"(205mm)            |                 | 12"(315mm)           |                 | 20"(510mm)           |                 |
|-------------------|----------------------|-----------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-8A-05BS      | SFNL083-8A-05WS | SFNL083-12-05BS      | SFNL083-12-05WS | SFNL083-20-05BS      | SFNL083-20-05WS |
| Voltage           | 10-30V               |                 | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                 | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                 | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Adjustable mount     |                 | Adjustable mount     |                 | Adjustable mount     |                 |
| Color Temperature | Daylight white 5700K |                 | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing   | Black housing        | White housing   | Black housing        | White housing   |



| Overall Length    | 24"(605mm)           |                  | 34"(865mm)           |                 | 40"(1015mm)          |                 |
|-------------------|----------------------|------------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-24A-05BP     | SFNL083-24A-05WP | SFNL083-34-05BP      | SFNL083-34-05WP | SFNL083-40-05BP      | SFNL083-40-05WP |
| Voltage           | 10-30V               |                  | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                  | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                  | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Adjustable mount     |                  | Adjustable mount     |                 | Adjustable mount     |                 |
| Color Temperature | Daylight white 5700K |                  | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing    | Black housing        | White housing   | Black housing        | White housing   |




| Overall Length    | 24"(605mm)           |                  | 34"(865mm)           |                 | 40"(1015mm)          |                 |
|-------------------|----------------------|------------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-24A-05BS     | SFNL083-24A-05WS | SFNL083-34-05BS      | SFNL083-34-05WS | SFNL083-40-05BS      | SFNL083-40-05WS |
| Voltage           | 10-30V               |                  | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                  | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                  | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Adjustable mount     |                  | Adjustable mount     |                 | Adjustable mount     |                 |
| Color Temperature | Daylight white 5700K |                  | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing    | Black housing        | White housing   | Black housing        | White housing   |

All-Round Pole Lights


# LED All-Round Pole Lights 05 Series Plug-in Mount

## Plastic Base

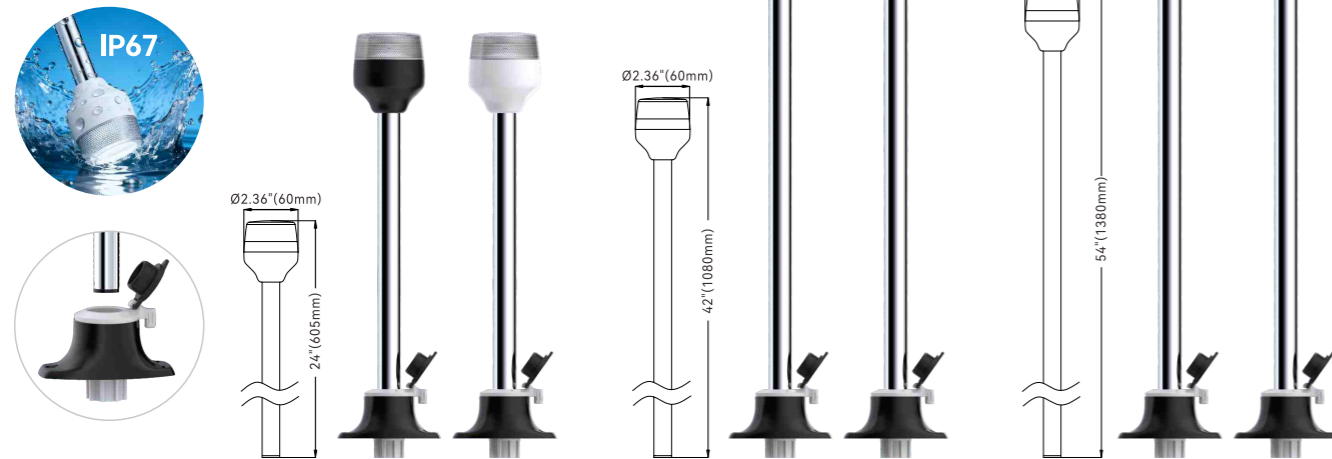

| Overall Length    | 24"(605mm)           |                  | 42"(1080mm)          |                 | 54"(1380mm)          |                 |
|-------------------|----------------------|------------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-24P-05BP     | SFNL083-24P-05WP | SFNL083-42-05BP      | SFNL083-42-05WP | SFNL083-54-05BP      | SFNL083-54-05WP |
| Voltage           | 10-30V               |                  | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                  | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                  | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Plug-in mount        |                  | Plug-in mount        |                 | Plug-in mount        |                 |
| Color Temperature | Daylight white 5700K |                  | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing    | Black housing        | White housing   | Black housing        | White housing   |

## 316 Stainless Steel Base

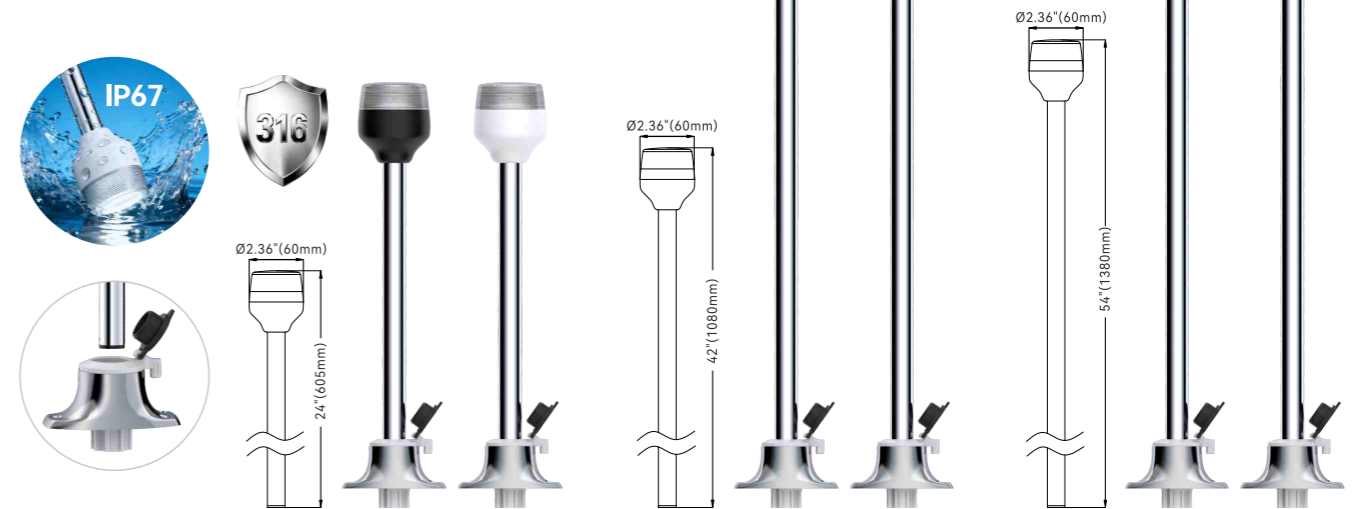

| Overall Length    | 24"(605mm)           |                  | 42"(1080mm)          |                 | 54"(1380mm)          |                 |
|-------------------|----------------------|------------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-24P-05BS     | SFNL083-24P-05WS | SFNL083-42-05BS      | SFNL083-42-05WS | SFNL083-54-05BS      | SFNL083-54-05WS |
| Voltage           | 10-30V               |                  | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                  | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                  | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Plug-in mount        |                  | Plug-in mount        |                 | Plug-in mount        |                 |
| Color Temperature | Daylight white 5700K |                  | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing    | Black housing        | White housing   | Black housing        | White housing   |

# LED All-round Pole Lights 06 Series

## Plug-in Mount, Angled

The inclination angle of the lamp post is 150°




Plastic



316 Stainless Steel

### Plastic Base

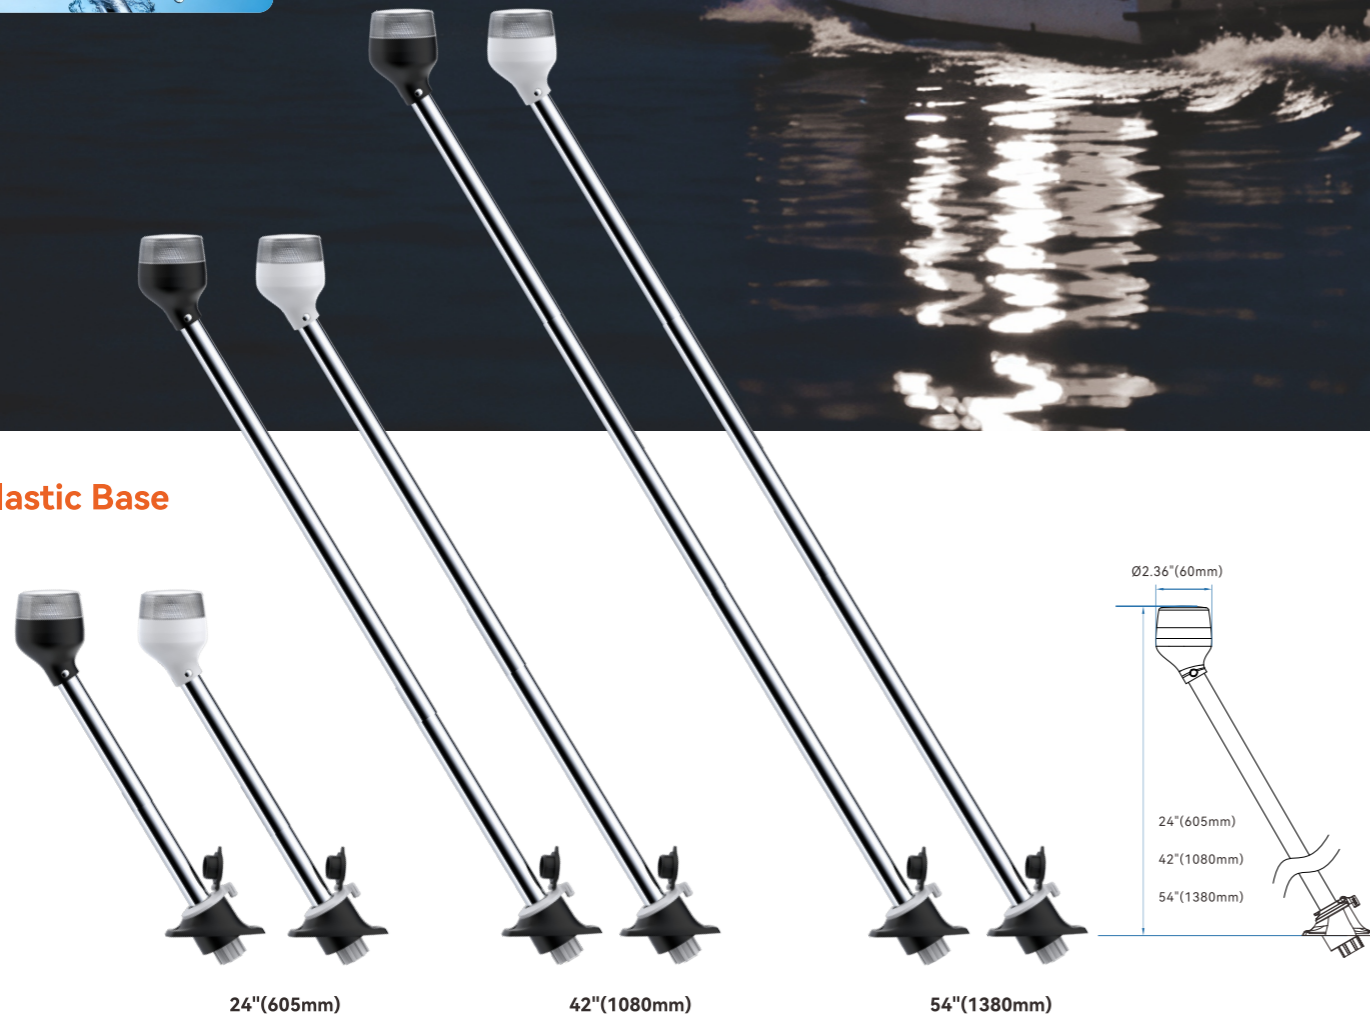

24"(605mm)

42"(1080mm)

54"(1380mm)

### 316 Stainless Steel Base



54"(1380mm)

42"(1080mm)

24"(605mm)

| Overall Length    | 24"(605mm)           |                 | 42"(1080mm)          |                 | 54"(1380mm)          |                 |
|-------------------|----------------------|-----------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-24-06BP      | SFNL083-24-06WP | SFNL083-42-06BP      | SFNL083-42-06WP | SFNL083-54-06BP      | SFNL083-54-06WP |
| Voltage           | 10-30V               |                 | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                 | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                 | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Plug-in mount        |                 | Plug-in mount        |                 | Plug-in mount        |                 |
| Color Temperature | Daylight white 5700K |                 | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing   | Black housing        | White housing   | Black housing        | White housing   |


| Overall Length    | 24"(605mm)           |                 | 42"(1080mm)          |                 | 54"(1380mm)          |                 |
|-------------------|----------------------|-----------------|----------------------|-----------------|----------------------|-----------------|
| Model             | SFNL083-24-06BS      | SFNL083-24-06WS | SFNL083-42-06BS      | SFNL083-42-06WS | SFNL083-54-06BS      | SFNL083-54-06WS |
| Voltage           | 10-30V               |                 | 10-30V               |                 | 10-30V               |                 |
| Visibility        | 2NM                  |                 | 2NM                  |                 | 2NM                  |                 |
| Wattage           | 1.5W                 |                 | 1.5W                 |                 | 1.5W                 |                 |
| Base Type         | Plug-in mount        |                 | Plug-in mount        |                 | Plug-in mount        |                 |
| Color Temperature | Daylight white 5700K |                 | Daylight white 5700K |                 | Daylight white 5700K |                 |
| Housing Color     | Black housing        | White housing   | Black housing        | White housing   | Black housing        | White housing   |

## Mounting Base for Plug-in Mount Pole Lights

SEAFLO Plug-In Light Base is a dependable, easy to use base for an pole light (sold separately). The innovative design ensures the pole inserts with a tight and secure fit, and it prevents rattling while the boat is underway or during trailering.






| Model     | SFPB-04  | SFPB-04S                        | SFPB-05                                      | SFPB-05S                        |
|-----------|--|---------------------------------|--|---------------------------------|
| Base Type | Straight base  | Straight base                   | Angled base                                  | Angled base                     |
| Material  | Plastic  | 316 stainless steel and Plastic | Plastic                                      | 316 stainless steel and Plastic |
| Size      | 3.34" x 1.89" x 2.30" (85mm x 48mm x 58.5mm)               |                                 | 3.34" x 1.89" x 2.30" (85mm x 48mm x 58.5mm) |                                 |
| Fits      | 05 and 06 series LED all-round pole lights (plug-in mount) |                                 |  |                                 |

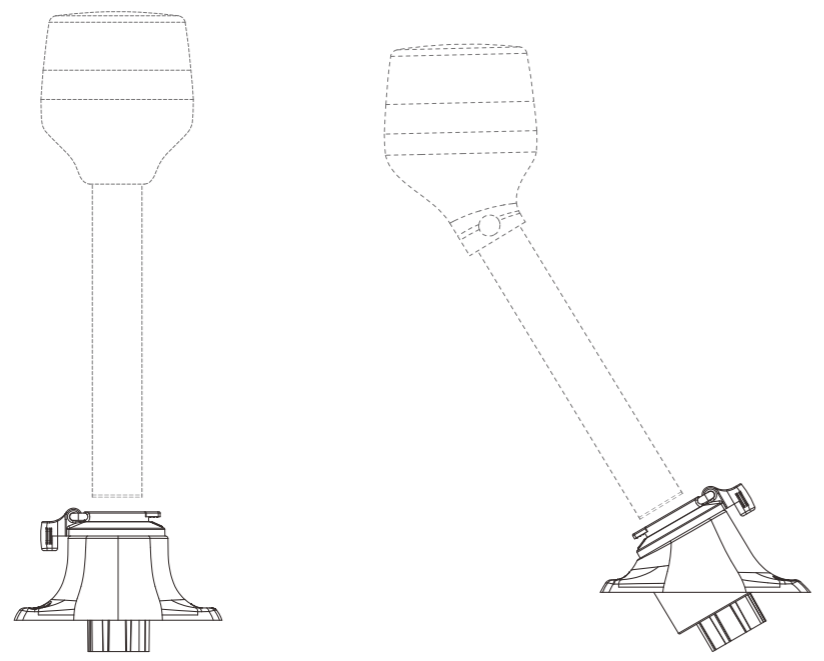

## LED Bi-Color Bow Lights


Whether at anchor or underway, it's important your navigation lights are both functional and clearly visible to nearby boaters. This super-bright, sealed-for-life nav light is strong for a long and dependable life on the bow. The high-efficiency LED bi-color lamp has red and green LEDs, with a sector angle of 112.5° each, and is for use on the bow of sailboats and power-craft. It can be used in place of traditional sidelights or incandescent bow-lights. These lamps are designed to be mounted on a vertical surface.

|                 |                                      |
|-----------------|--------------------------------------|
| Model:          | SFNL051-11B-03B                      |
| Overall Length: | 11-1/8" (282mm)                      |
| Voltage:        | 12 V                                 |
| Visibility:     | 1NM                                  |
| Wattage:        | 2W                                   |
| Base Type:      | Plug-in mount (w / SS Straight base) |
| Material:       | Plastic+Stainless Steel              |

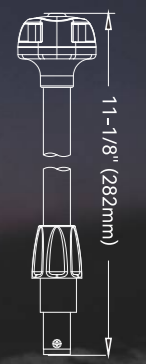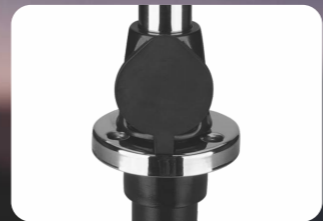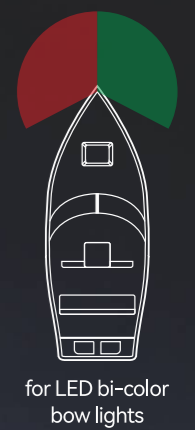


## LED All-Round Pole Lights 04 Series

Color Temperature: Daylight white 4000-4500K  
LED All-Round Light use for boats up to 65.6 ft (20m)

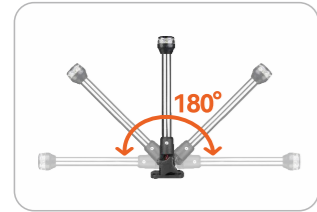


| Overall Length | 9.5" (247mm)            | 12" (305mm)      | 23.6" (600mm)    |
|----------------|-------------------------|------------------|------------------|
| Model          | SFNL083-9-04B           | SFNL083-12-04B   | SFNL083-24-04B   |
| Voltage        | 10-30V                  | 10-30V           | 10-30V           |
| Visibility     | 2NM                     | 2NM              | 2NM              |
| Wattage        | 1W                      | 1W               | 1W               |
| Base Type      | Adjustable mount        | Adjustable mount | Adjustable mount |
| Material       | Plastic+Stainless Steel |                  |                  |

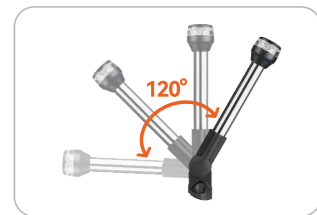



| Overall Length | 6" (152mm)              | 15" (381mm)             | 22" (557mm)             | 27"~41" (695~1050mm)  |
|----------------|-------------------------|-------------------------|-------------------------|-----------------------|
| Model          | SFNL083-6-04B           | SFNL083-15-04B          | SFNL083-22-04B          | SFNL083-41-04B        |
| Voltage        | 10-30V                  | 10-30V                  | 10-30V                  | 10-30V                |
| Visibility     | 2NM                     | 2NM                     | 2NM                     | 2NM                   |
| Wattage        | 1W                      | 1W                      | 1W                      | 1W                    |
| Base Type      | Fixed mount             | Adjustable mount        | Plug-in Mount           | Plug-in Mount         |
| Material       | Plastic+Stainless Steel | Plastic+Stainless Steel | Plastic+Stainless Steel | Plastic+Aluminum pole |

## LED All-Round Pole Lights 02 Series

Color Temperature: Daylight white 4000-4500K  
LED All-Round Light use for boats up to 65.6 ft (20m).

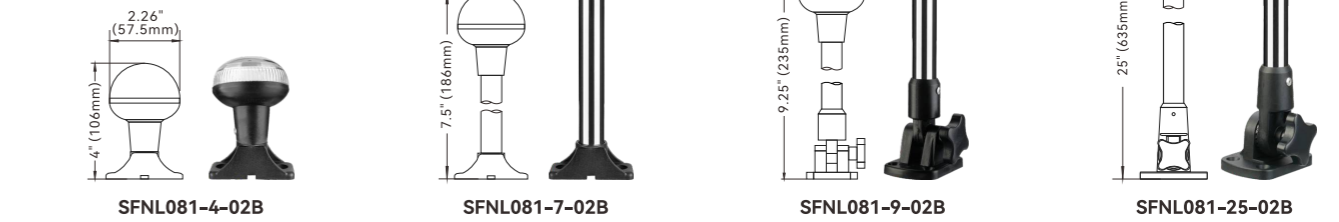

| Overall Length | 4" (106mm)              | 7-1/2" (186mm) | 9-1/4" (235mm)   | 25" (635mm)      |
|----------------|-------------------------|----------------|------------------|------------------|
| Model          | SFNL081-4-02B           | SFNL081-7-02B  | SFNL081-9-02B    | SFNL081-25-02B   |
| Voltage        | 12V                     | 12 V           | 12 V             | 12 V             |
| Visibility     | 2NM                     | 2NM            | 2NM              | 2NM              |
| Wattage        | 1.5W                    | 1.5W           | 1.5W             | 1.5W             |
| Base Type      | Fixed mount             | Fixed mount    | Adjustable mount | Adjustable mount |
| Material       | Plastic+Stainless Steel |                |                  |                  |

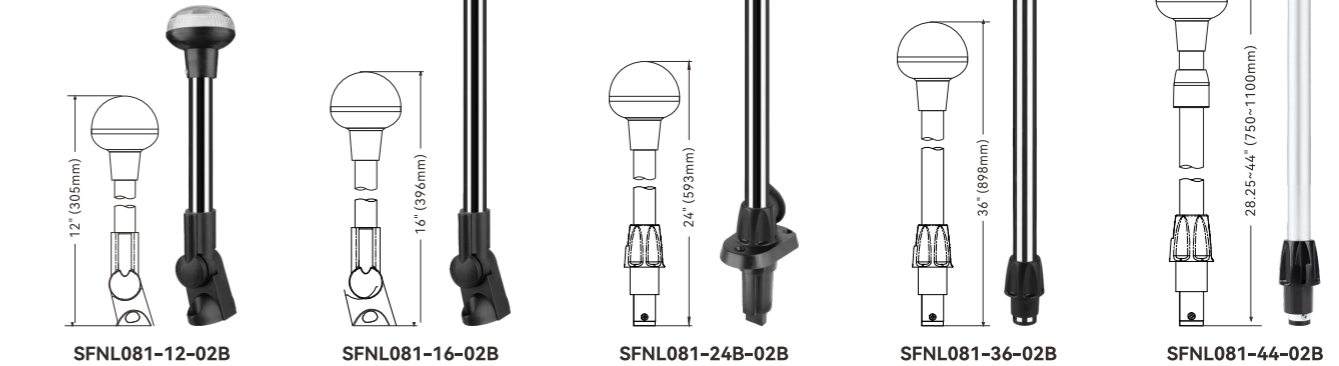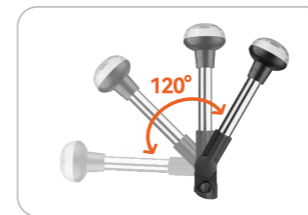

| Overall Length | 12" (305mm)             | 16" (396mm)      | 24" (593mm)                      | 36" (898mm)    | 28-1/4"~44" (750~1110mm) |
|----------------|-------------------------|------------------|----------------------------------|----------------|--------------------------|
| Model          | SFNL081-12-02B          | SFNL081-16-02B   | SFNL081-24B-02B                  | SFNL081-36-02B | SFNL081-44-02B           |
| Voltage        | 12 V                    | 12 V             | 12 V                             | 12 V           | 12 V                     |
| Visibility     | 2NM                     | 2NM              | 2NM                              | 2NM            | 2NM                      |
| Wattage        | 1.5W                    | 1.5W             | 1.5W                             | 1.5W           | 1.5W                     |
| Base Type      | Adjustable mount        | Adjustable mount | Plug-in mount with straight base | Plug-in mount  | Plug-in mount            |
| Material:      | Plastic+Stainless Steel |                  |                                  |                | Plastic+Aluminum         |

## LED All-Round Pole Lights 03 Series

Material: Plastic+Stainless Steel  
Color Temperature: Daylight white 4000-4500K  
LED All-Round Light use for boats up to 65.6 ft (20m)



| Overall Length | 2-4/5" (71mm) | 4-7/8" (124mm) | 4-7/8" (124mm) | 9-1/2" (248mm)   | 12-1/2" (318mm) |
|----------------|---------------|----------------|----------------|------------------|-----------------|
| Model          | SFNL083-2-03B | SFNL083-5-03B  | SFNL083-5-03W  | SFNL083-9-03B    | SFNL083-12-03B  |
| Voltage        | 12-24V        | 12-24V         | 12-24V         | 12-24V           | 12-24V          |
| Visibility     | 3NM           | 3NM            | 3NM            | 3NM              | 3NM             |
| Wattage        | 2.5W          | 2.5W           | 2.5W           | 2.5W             | 2.5W            |
| Base Type      | /             | Fixed mount    | Fixed mount    | Adjustable mount | Fixed mount     |



| Overall Length | 16" (403mm)      | 25" (642mm)      | 24" (600mm)    | 36" (905mm)    | 24" (600mm)                     |
|----------------|------------------|------------------|----------------|----------------|---------------------------------|
| Model          | SFNL083-16-03B   | SFNL083-25-03B   | SFNL083-24-03B | SFNL083-36-03B | SFNL083-24B-03B                 |
| Voltage        | 12-24V           | 12-24V           | 12-24V         | 12-24V         | 12-24V                          |
| Visibility     | 3NM              | 3NM              | 3NM            | 3NM            | 3NM                             |
| Wattage        | 2.5W             | 2.5W             | 2.5W           | 2.5W           | 2.5W                            |
| Base Type      | Adjustable mount | Adjustable mount | Plug-in mount  | Plug-in mount  | Plug-in mount (w/Straight base) |


## LED All-Round Pole Lights 01 Series



| Overall Length | 4" (99mm)     | 10" (259mm)             | 12" (293mm)             |
|----------------|---------------|-------------------------|-------------------------|
| Model          | SFNL061-4-01B | SFNL061-10-01B          | SFNL061-12-01B          |
| Voltage        | 12V           | 12V                     | 12V                     |
| Visibility     | 2NM           | 2NM                     | 2NM                     |
| Wattage        | 3.1W          | 3.1W                    | 3.1W                    |
| Base Type      | Fixed mount   | Adjustable mount        | Fixed mount             |
| Bulb Type      | LED           | LED                     | LED                     |
| Material       | Plastic       | Plastic+Stainless steel | Plastic+Stainless steel |

## Mounting Base for Plug-in Mount Pole Lights

Compatible with 02, 03, and 04 series LED all-round pole lights (plug-in mount)

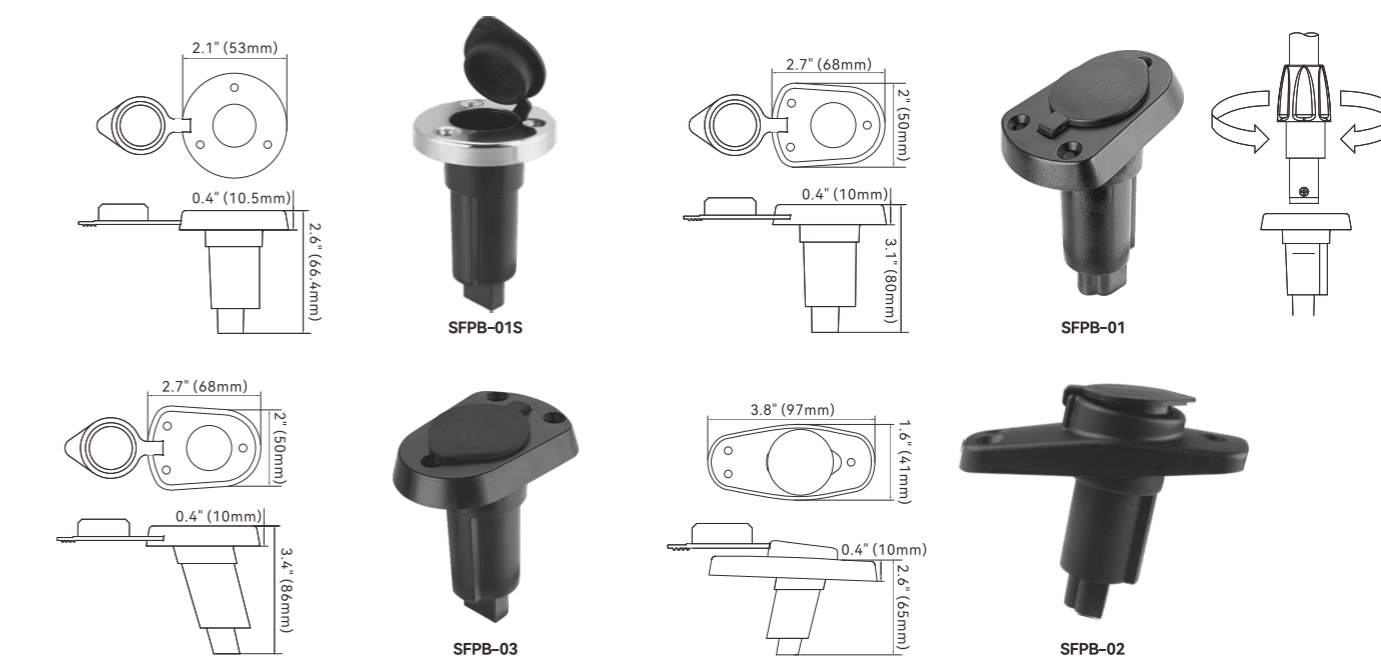

| Model     | SFPB-01S                               | SFPB-01                             | SFPB-03                             | SFPB-02                             |
|-----------|--|-------------------------------------|-------------------------------------|-------------------------------------|
| Base Type | Straight base                          | Straight base                       | Angled base                         | Angled base                         |
| Material  | Stainless Steel and PC                 | Plastic                             | Plastic                             | Plastic                             |
| Size      | 2.1" x 2.1" x 2.6" (53 x 53 x 66.4 mm) | 2.7" x 2.0" x 3.1" (68 x 50 x 80mm) | 2.7" x 2.0" x 3.4" (68 x 50 x 86mm) | 3.8" x 1.6" x 2.6" (97 x 41 x 65mm) |

All-Round Pole Lights



316 STAINLESS STEEL COVER IP68



Single package A pair of packages

### LED Underwater Lights

SEAFLO LED underwater light is made of marine-grade 316 stainless steel and high-strength engineering plastic, designed to withstand harsh marine environments. It is vibration and shock resistant. The light features a waterproof design with an IP68 rating. There are various styles and colors available to choose from. High-intensity lighting makes your boat more visible, enhancing safety during night activities.

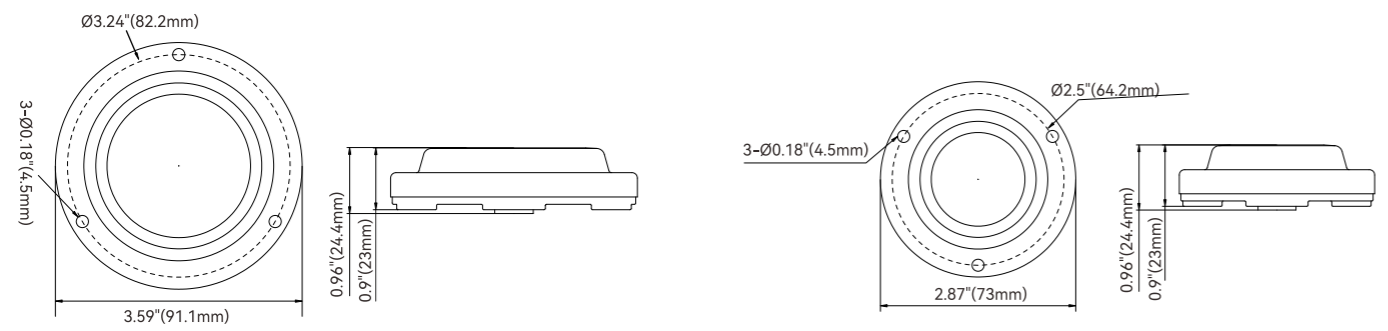

### Underwater Lights 02 Series (3 LEDs)




| Model        | Light Color | Voltage | Power | Lumens | Beam Angle | Size   | Quantity |
|--------------|-------------|---------|-------|--------|------------|--------|----------|
| SFUL1-3W-02  | White       | 12V     | 9W    | 800lm  | 80°        | Ø2.87" | Single   |
| SFUL1-3B-02  | Blue        | 12V     | 9W    | 800lm  | 80°        | Ø2.87" | Single   |
| SFUL1-3G-02  | Green       | 12V     | 9W    | 800lm  | 80°        | Ø2.87" | Single   |
| SFUL1-3R-02  | RGBW        | 12V     | 3.5W  | 9-40lm | 80°        | Ø2.87" | Single   |
| SFUL1-3W-02P | White       | 12V     | 9W    | 800lm  | 80°        | Ø2.87" | Pair     |
| SFUL1-3B-02P | Blue        | 12V     | 9W    | 800lm  | 80°        | Ø2.87" | Pair     |
| SFUL1-3G-02P | Green       | 12V     | 9W    | 800lm  | 80°        | Ø2.87" | Pair     |
| SFUL1-3R-02P | RGBW        | 12V     | 3.5W  | 9-40lm | 80°        | Ø2.87" | Pair     |

### Underwater Lights 02 Series (6 LEDs)




| Model        | Light Color | Voltage | Power | Lumens  | Beam Angle | Size   | Quantity |
|--------------|-------------|---------|-------|---------|------------|--------|----------|
| SFUL1-6W-02  | White       | 12V     | 18W   | 1350lm  | 80°        | Ø3.59" | Single   |
| SFUL1-6B-02  | Blue        | 12V     | 18W   | 1350lm  | 80°        | Ø3.59" | Single   |
| SFUL1-6G-02  | Green       | 12V     | 18W   | 1350lm  | 80°        | Ø3.59" | Single   |
| SFUL1-6R-02  | RGBW        | 12V     | 7W    | 18-85lm | 80°        | Ø3.59" | Single   |
| SFUL1-6W-02P | White       | 12V     | 18W   | 1350lm  | 80°        | Ø3.59" | Pair     |
| SFUL1-6B-02P | Blue        | 12V     | 18W   | 1350lm  | 80°        | Ø3.59" | Pair     |
| SFUL1-6G-02P | Green       | 12V     | 18W   | 1350lm  | 80°        | Ø3.59" | Pair     |
| SFUL1-6R-02P | RGBW        | 12V     | 7W    | 18-85lm | 80°        | Ø3.59" | Pair     |

LED Underwater Lights

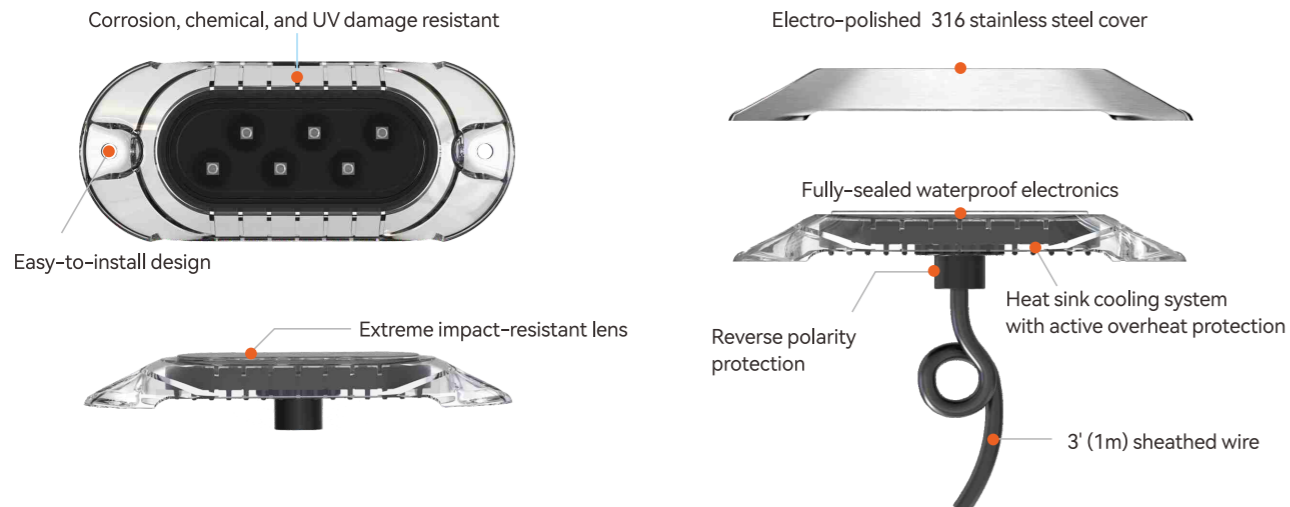


Underwater Lights 01 Series (6 LEDs)

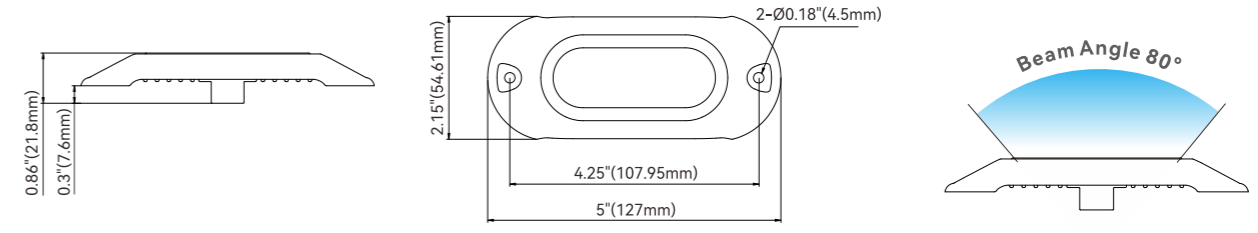


| Model       | Light Color | Voltage | Power | Lumens | Beam Angle | Size      |
|-------------|-------------|---------|-------|--------|------------|-----------|
| SFUL1-6W-01 | White       | 12V     | 18W   | 1350lm | 80°        | 5" length |
| SFUL1-6B-01 | Blue        | 12V     | 18W   | 1350lm | 80°        | 5" length |
| SFUL1-6G-01 | Green       | 12V     | 18W   | 1350lm | 80°        | 5" length |

Underwater Lights 01 Series (3 LEDs)

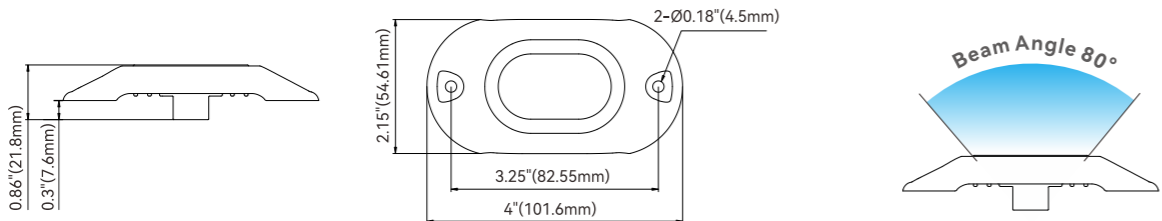

| Model       | Light Color | Voltage | Power | Lumens | Beam Angle | Size      |
|-------------|-------------|---------|-------|--------|------------|-----------|
| SFUL1-3W-01 | White       | 12V     | 9W    | 800lm  | 80°        | 4" length |
| SFUL1-3B-01 | Blue        | 12V     | 9W    | 800lm  | 80°        | 4" length |
| SFUL1-3G-01 | Green       | 12V     | 9W    | 800lm  | 80°        | 4" length |


Underwater Lights 01 Series (12 LEDs)

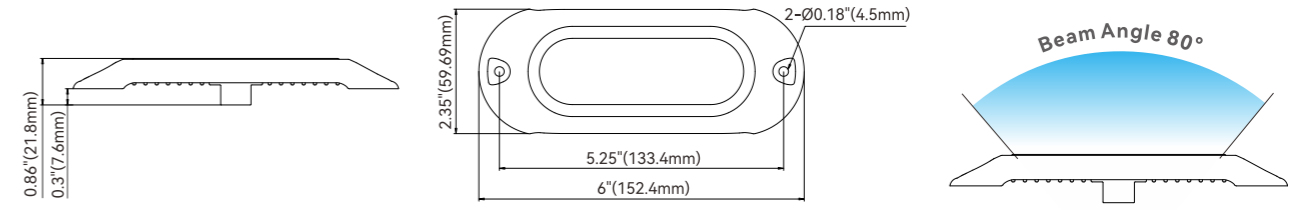

| Model        | Light Color | Voltage | Power | Lumens | Beam Angle | Size      |
|--------------|-------------|---------|-------|--------|------------|-----------|
| SFUL1-12W-01 | White       | 12V     | 36W   | 1650lm | 80°        | 6" length |
| SFUL1-12B-01 | Blue        | 12V     | 36W   | 1650lm | 80°        | 6" length |
| SFUL1-12G-01 | Green       | 12V     | 36W   | 1650lm | 80°        | 6" length |


LED Underwater Lights

### LED Floodlights 03 Series (Bracket Mount)

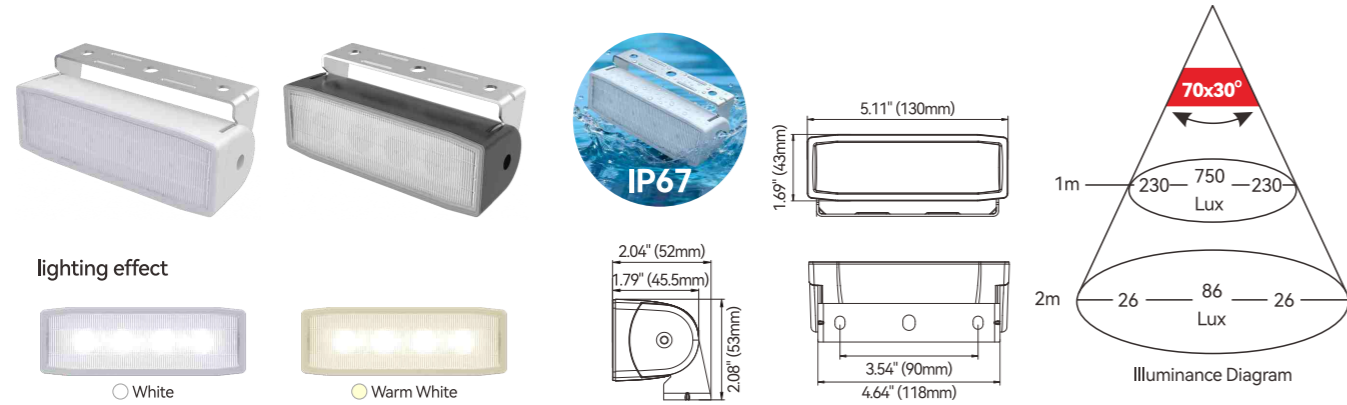

| Model             | SFFL3-550W-03W  | SFFL3-550W-03B | SFFL3-450Y-03W  | SFFL3-450Y-03B |
|-------------------|---|----------------|---|----------------|
| Voltage           | 12/24V  |                | 12/24V  |                |
| Power             | 6W  |                | 6W  |                |
| Color Temperature | 5000K (White)   |                | 3000K (Warm White)                                    |                |
| Luminous Flux     | 550 lm  |                | 550 lm  |                |
| Housing Color     | White   | Black          | White   | Black          |
| Installation      | Bracket Mount   |                | Bracket Mount   |                |
| Material          | Thermally Conductive Nylon + PC + 316 Stainless Steel |                | Thermally Conductive Nylon + PC + 316 Stainless Steel |                |
| Cable             | 2.5m  |                | 2.5m  |                |

### LED Floodlights 04 Series (Flush Mount)

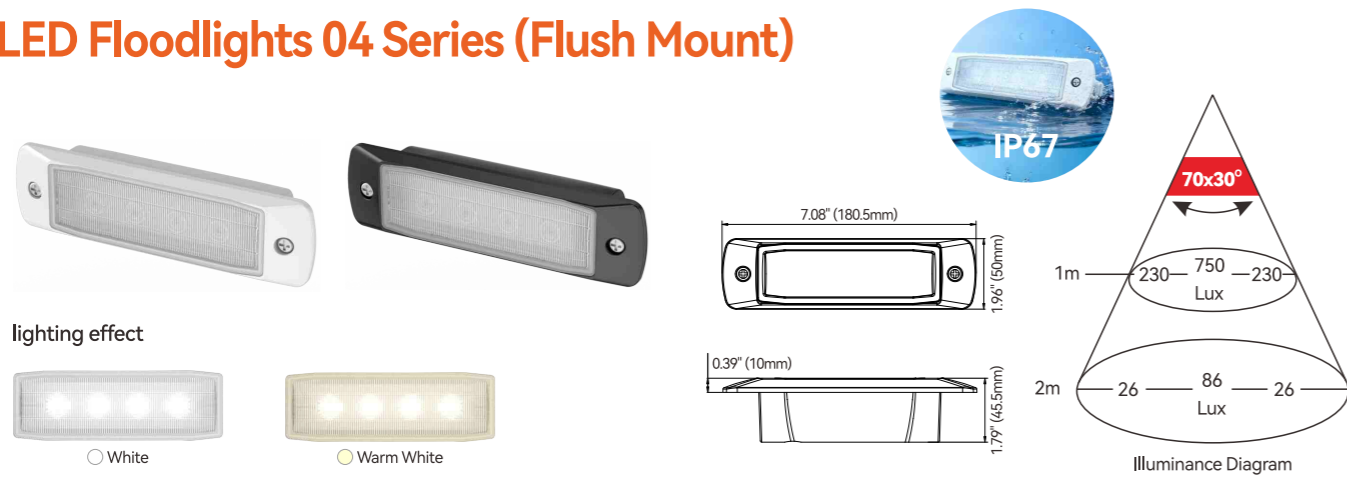

| Model             | SFFL3-550W-04W                  | SFFL3-550W-04B | SFFL3-450Y-04W                  | SFFL3-450Y-04B |
|-------------------|---------------------------------|----------------|---------------------------------|----------------|
| Voltage           | 12/24V                          |                | 12/24V                          |                |
| Power             | 6W                              |                | 6W                              |                |
| Color Temperature | 5000K (White)                   |                | 3000K (Warm White)              |                |
| Luminous Flux     | 550 lm                          |                | 550 lm                          |                |
| Housing Color     | White                           | Black          | White                           | Black          |
| Installation      | Flush Mount                     |                | Flush Mount                     |                |
| Material          | Thermally Conductive Nylon + PC |                | Thermally Conductive Nylon + PC |                |
| Cable             | 0.5m                            |                | 0.5m                            |                |

### LED Floodlights 02 Series (Bracket Mount)



| Model            | Voltage | Power                     | Color Temperature | Luminous Flux | Housing Color | Material  | Cable |
|------------------|---------|---------------------------|-------------------|---------------|---------------|---|-------|
| SFFL3-1500WW-02W | 12/24V  | 15W (High-Intensity Mode) | 5000K (White)     | 1500 lm       | White         | Thermally Conductive Nylon + PC + 316 Stainless Steel | 2.5m  |
| SFFL3-1500WW-02B |         | 3W (Low-Intensity Mode)   |                   |               | Black         |   |       |

### Dual Colour LED Floodlights 01 Series Bracket Mount






| Model           | Voltage | Power                                    | Color Temperature                   | Luminous Flux | Housing Color | Material  | Cable |
|-----------------|---------|--|-------------------------------------|---------------|---------------|---|-------|
| SFFL3-850WB-01W | 12/24V  | 10W (White LEDs)<br>4W (Blue LEDs)       | 5000K (White)                       | 850 lm        | White         | Thermally Conductive Nylon + PC + 316 Stainless Steel | 2.5m  |
| SFFL3-850WB-01B |         |  |                                     |               | Black         |   |       |
| SFFL3-850WR-01W |         | 10W (White LEDs)<br>2W (Red LEDs)        | 5000K (White)                       |               | White         |   |       |
| SFFL3-850WR-01B |         |  |                                     |               | Black         |   |       |
| SFFL3-850WY-01W |         | 10W (White LEDs)<br>3W (Warm White LEDs) | 5000K (White)<br>2700K (Warm White) |               | White         |   |       |
| SFFL3-850WY-01B |         |  |                                     |               | Black         |   |       |




Flush Mount Bracket Mount

### LED Floodlights 3 LEDs

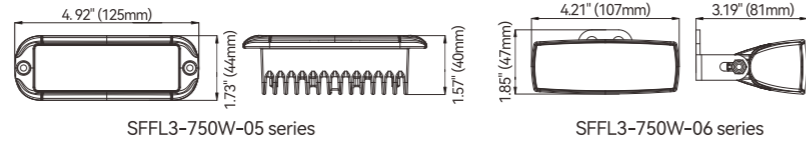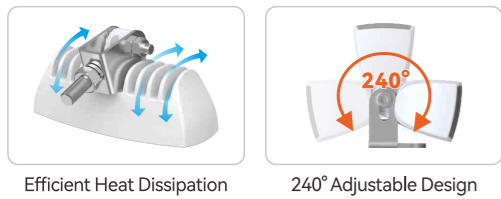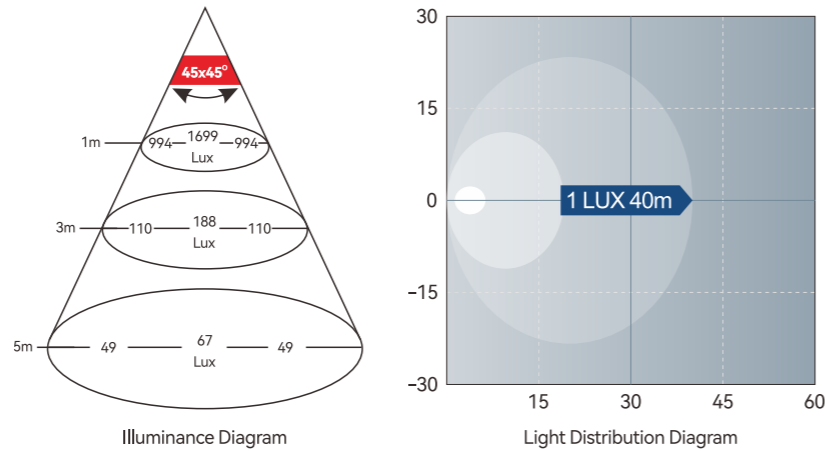


| Model             | SFFL3-750W-05W    | SFFL3-750W-05B | SFFL3-750W-06W                   | SFFL3-750W-06B |
|-------------------|-------------------|----------------|----------------------------------|----------------|
| Voltage           | 12/24V            |                | 12/24V                           |                |
| Power             | 12W               |                | 12W                              |                |
| Color Temperature | White light 5000K |                | White light 5000K                |                |
| Luminous Flux     | 750 lm            |                | 750 lm                           |                |
| Beam Angle        | 45°               |                | 45°                              |                |
| Housing Color     | White             | Black          | White                            | Black          |
| Material          | PC+Aluminium      |                | PC+Aluminium+316 Stainless Steel |                |

### LED Floodlights 6 LEDs

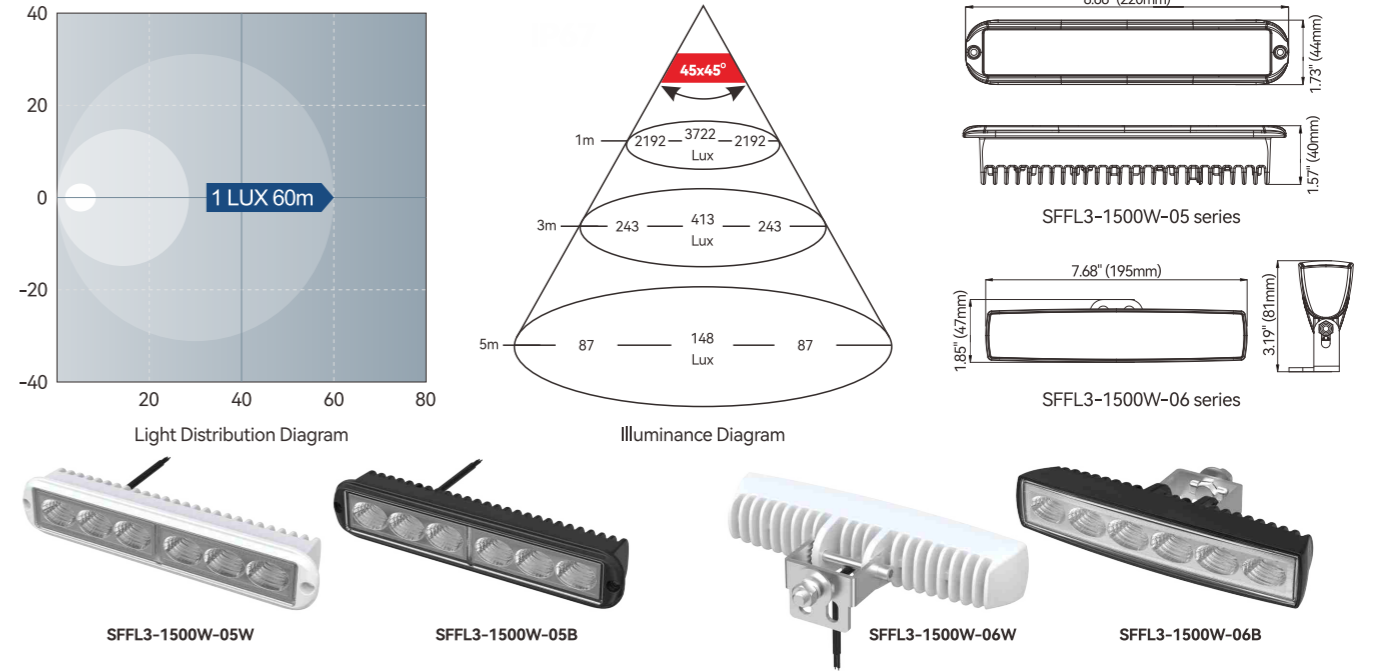

| Model             | SFFL3-1500W-05W   | SFFL3-1500W-05B | SFFL3-1500W-06W                  | SFFL3-1500W-06B |
|-------------------|-------------------|-----------------|----------------------------------|-----------------|
| Voltage           | 12/24V            |                 | 12/24V                           |                 |
| Power             | 24W               |                 | 24W                              |                 |
| Color Temperature | White light 5000K |                 | White light 5000K                |                 |
| Luminous Flux     | 1500 lm           |                 | 1500 lm                          |                 |
| Beam Angle        | 45°               |                 | 45°                              |                 |
| Housing Color     | White             | Black           | White                            | Black           |
| Material          | PC+Aluminium      |                 | PC+Aluminium+316 Stainless Steel |                 |

### LED Floodlights 12 LEDs

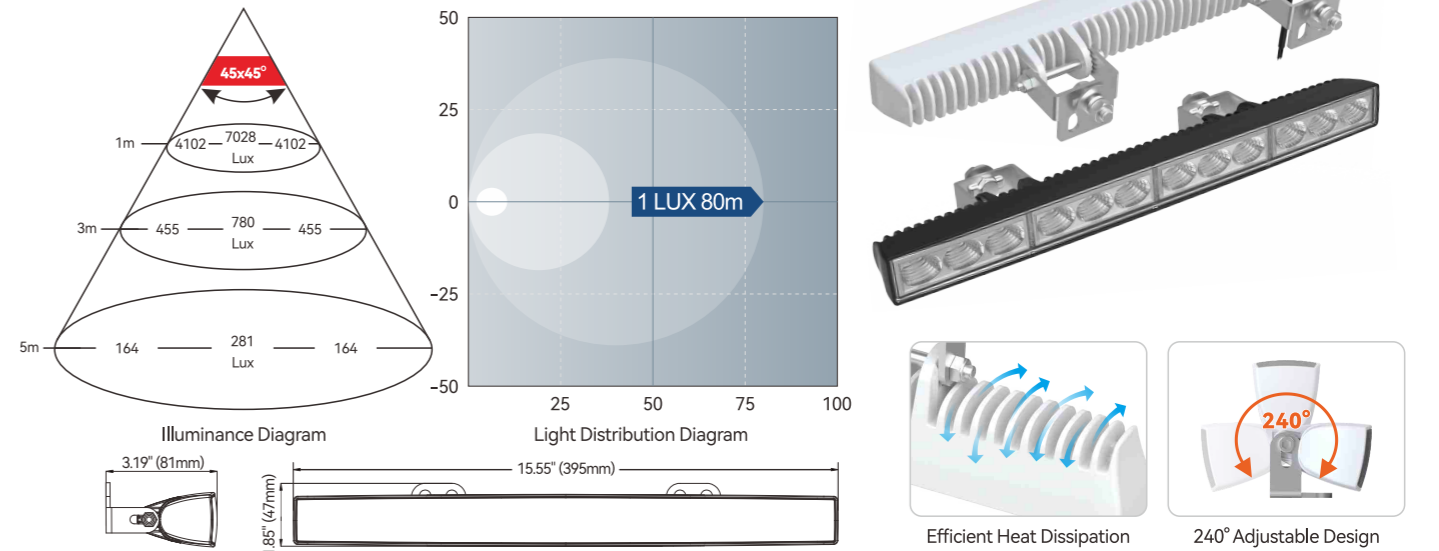

| Model           | Voltage | Power | Color Temperature | Luminous Flux | Beam Angle | Material                         | Housing Color |
|-----------------|---------|-------|-------------------|---------------|------------|----------------------------------|---------------|
| SFFL3-3000W-06W | 12/24V  | 24W   | White light 5000K | 3000 lm       | 45°        | PC+Aluminium+316 Stainless Steel | White         |
| SFFL3-3000W-06B |         |       |                   |               |            |                                  | Black         |



## LED Floodlights

Exquisite, high-quality LEDs grace seaflo floodlight, delivering unparalleled maximum light output that floods your surroundings with brilliant illumination, while simultaneously demonstrating remarkable energy efficiency. Perfectly suited for marine environments, these LEDs ensure both safety and aesthetic appeal on the water.

**CREE LED**  
high-lumen chips, long-lasting high intensity, stable lighting performance




## LED Floodlights 08 Series (Bracket Mount)



SFFL3-2400W-08BL  
SFFL3-2100Y-08BL



SFFL3-2400W-08WL  
SFFL3-2100Y-08WL

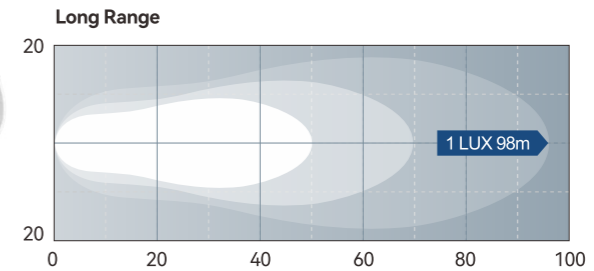



316 stainless steel bracket



SFFL3-2400W-08BC  
SFFL3-2100Y-08BC



SFFL3-2400W-08WC  
SFFL3-2100Y-08WC

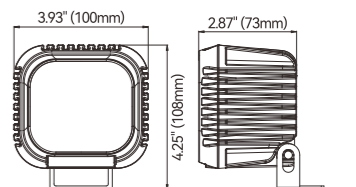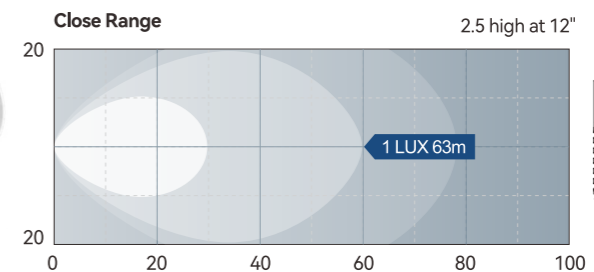



## LED Floodlights 07 Series (Bracket Mount)



SFFL3-1000W-07BL  
SFFL3-800Y-07BL





SFFL3-1000W-07WL  
SFFL3-800Y-07WL

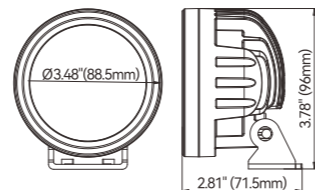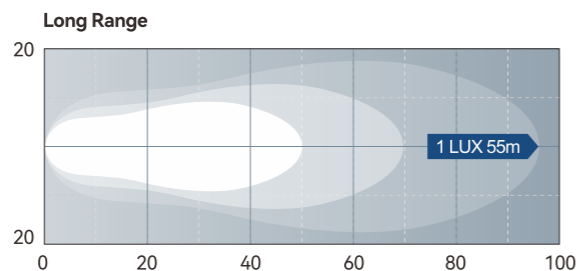

SFFL3-1000W-07BC  
SFFL3-800Y-07BC



SFFL3-1000W-07WC  
SFFL3-800Y-07WC

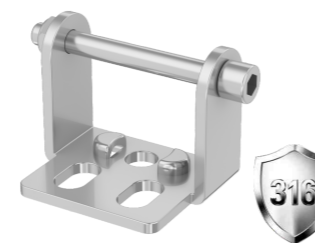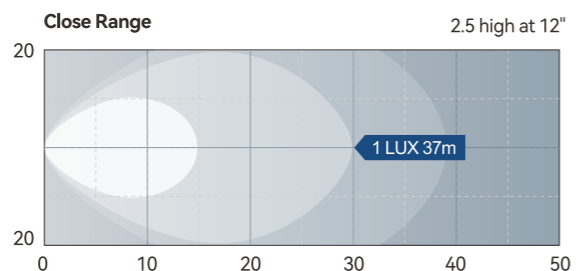

316 stainless steel bracket

| Model            | Lens Type   | Voltage | Power | Color Temperature  | Luminous Flux | Housing Color | Material                          | Cable |
|------------------|-------------|---------|-------|--------------------|---------------|---------------|-----------------------------------|-------|
| SFFL3-1000W-07BL | Long Range  | 12/24V  | 15W   | 5700K (White)      | 1000 lm       | Black         | Aluminium+<br>316 Stainless Steel | 0.3m  |
| SFFL3-1000W-07WL |             |         |       | White              |               |               |                                   |       |
| SFFL3-800Y-07BL  |             |         |       | 3000K (Warm White) | 800 lm        | Black         |                                   |       |
| SFFL3-800Y-07WL  |             |         |       | White              |               |               |                                   |       |
| SFFL3-1000W-07BC | Close Range | 12/24V  | 15W   | 5700K (White)      | 1000 lm       | Black         |                                   |       |
| SFFL3-1000W-07WC |             |         |       | White              |               |               |                                   |       |
| SFFL3-800Y-07BC  |             |         |       | 3000K (Warm White) | 800 lm        | Black         |                                   |       |
| SFFL3-800Y-07WC  |             |         |       | White              |               |               |                                   |       |

## LED Deck Lights


High quality LEDs for maximum light output and energy efficiency.



| Model       | Voltage | LED Wattage | Effective Wattage | Mount Type    | Color Temperature  | Material |
|-------------|---------|-------------|-------------------|---------------|--------------------|----------|
| SFDL1-WA-01 | 10-30 V | 18W         | 14W               | Bracket mount | White (5500-6300K) | Aluminum |

## LED Stern Light 02 Series

Electropolished 316 stainless steel cover  
Bright LED design, long lifespan, and low power consumption  
Watertight construction designed to resist corrosion  
Thin design with high durability

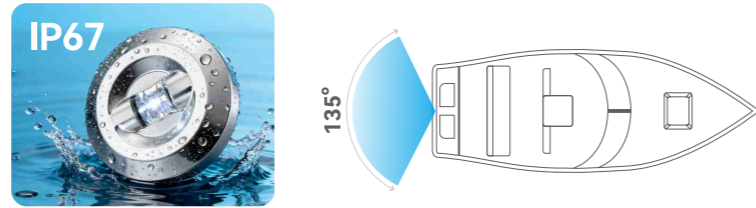


| Model          | SFNL043-W-02        | SFNL043-Y-02 | SFNL043-B-02 |
|----------------|---------------------|--------------|--------------|
| Voltage        | 10-30V              |              |              |
| Wattage        | 2W                  |              |              |
| Visibility     | 3NM                 |              |              |
| Angle          | 135°                |              |              |
| Lighting color | Cool White          | Warm White   | Blue         |
| Material       | Stainless Steel 316 |              |              |

## LED Stern Light 01 Series



Blister

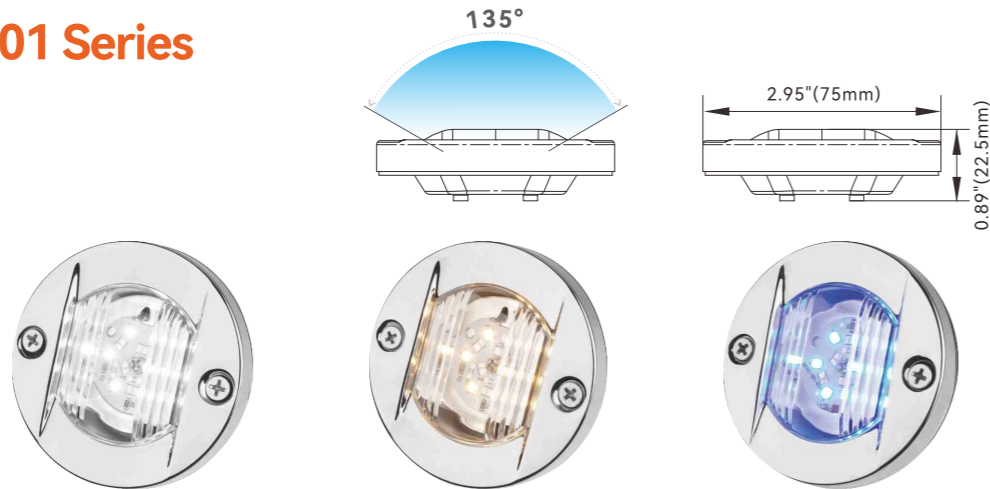

| Model          | SFNL041-W-01 | SFNL041-Y-01 | SFNL041-B-01 |
|----------------|--------------|--------------|--------------|
| Voltage        | 12V          |              |              |
| Wattage        | 2.2W         |              |              |
| Visibility     | 2NM          |              |              |
| Angle          | 135°         |              |              |
| Lighting color | Cool White   | Warm White   | Blue         |
| Material       | S.S.304      |              |              |


## LED Ceiling Light



| Model         | Voltage | Wattage | Power  | Installation Method | Color Temperature       | Material   |
|---------------|---------|---------|--------|---------------------|-------------------------|------------|
| SFCL1-3-WS-01 | 12V     | 1W      | 6x0.2W | Flush mount         | Cool White (5500-6300K) | PC White   |
| SFCL1-3-YS-01 |         |         |        |                     | Warm White(2900-3000K)  | PC White   |
| SFCL1-3-BS-01 |         |         |        |                     | Blue                    | PC+S.S.304 |
| SFCL1-3-RS-01 |         |         |        |                     | Red                     | PC+S.S.304 |


## LED Strip Light

These strip lamps provide a soft and uniform courtesy light pattern in white, warm white, blue or red. The range is ideal for interior or exterior applications including storage lockers, under cabinetry, under gunnels and more. The sealed switch system prevents moisture and other contaminants from affecting electronics. Surface mount installation with fastenings in each end of the lamp body are covered by snap-on end caps for a clean and modern appearance.

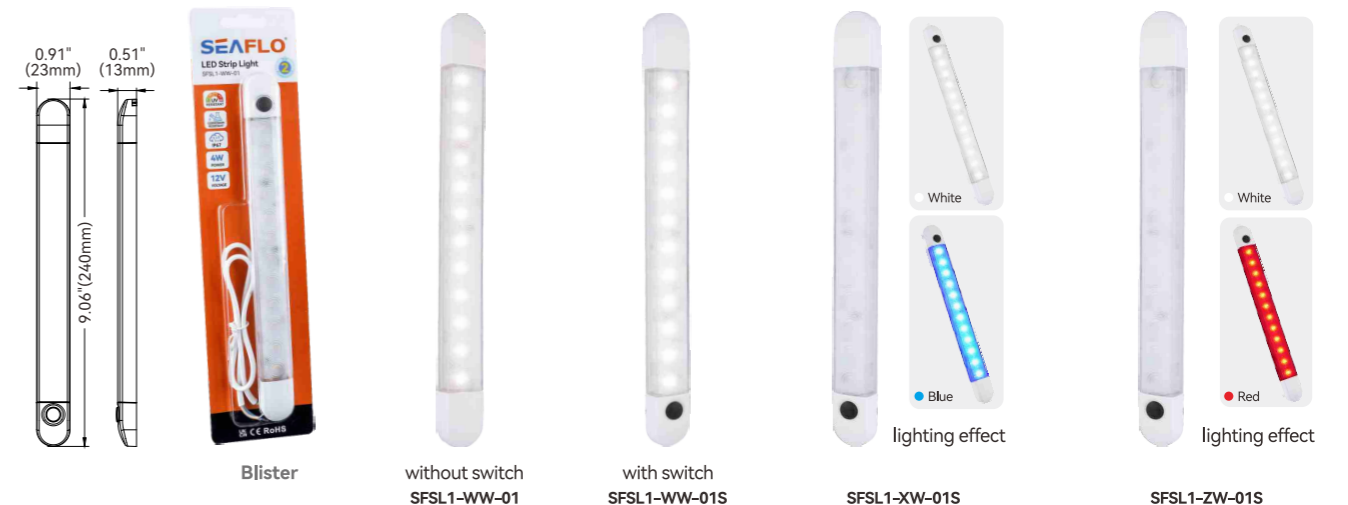

| Model        | Voltage | Wattage | Mount Type    | Color Temperature  | Switch | Material | Size         |
|--------------|---------|---------|---------------|--------------------|--------|----------|--------------|
| SFSL1-WW-01  | 12V     | 4W      | Surface mount | White (4000-4500K) | NO     | Plastic  | 9-3/8"/240mm |
| SFSL1-WW-01S |         |         |               | White (4000-4500K) | YES    |          |              |
| SFSL1-XW-01S |         |         |               | White+Blue         | YES    |          |              |
| SFSL1-ZW-01S |         |         |               | White+Red          | YES    |          |              |

## LED Ceiling Light

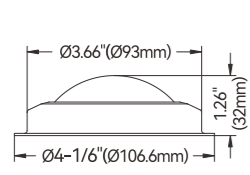

Lens 3 inch



SFCL1-4-WC-02



SFCL1-4-WS-02

| Model         | Voltage | Wattage | LED Power | Installation Method | Color Temperature  | Diameter         | Material |
|---------------|---------|---------|-----------|---------------------|--------------------|------------------|----------|
| SFCL1-4-WC-02 | 12V     | 3.6W    | 20 × 0.2W | Surface mount       | White (5500-6300K) | 4-1/6" (106.6mm) | Brass    |
| SFCL1-4-WS-02 |         |         |           |                     |                    |                  | S.S.304  |



Lens 4 inch



Blister



SFCL1-5-WC-02




SFCL1-5-WS-02



SFCL1-5-ZS-02

| Model         | Voltage | Wattage | LED Power | Installation Method | Color Temperature      | Diameter       | Material |
|---------------|---------|---------|-----------|---------------------|------------------------|----------------|----------|
| SFCL1-5-WC-02 | 12V     | 3.6W    | 20 × 0.2W | Surface mount       | White (5500-6300K)     | 5-3/8" (137mm) | Brass    |
| SFCL1-5-WS-02 |         |         |           |                     | White (5500-6300K)     |                | S.S.304  |
| SFCL1-5-ZS-02 |         |         |           |                     | Red/White (5500-6300K) |                | S.S.304  |

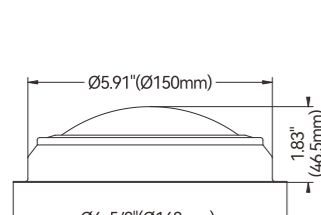

Lens 5 inch



SFCL1-6-WC-02



SFCL1-6-WS-02



SFCL1-6-WS-03



SFCL1-6-ZS-03

| Model         | Voltage | Wattage | LED Power | Installation Method | Color Temperature      | Diameter       | Material |
|---------------|---------|---------|-----------|---------------------|------------------------|----------------|----------|
| SFCL1-6-WC-02 | 12V     | 3.6W    | 20 × 0.2W | Surface mount       | White (5500-6300K)     | 6-5/8" (168mm) | Brass    |
| SFCL1-6-WS-02 |         |         |           |                     | White (5500-6300K)     |                | S.S.304  |
| SFCL1-6-WS-03 |         |         |           |                     | White (5500-6300K)     |                | S.S.304  |
| SFCL1-6-ZS-03 |         |         |           |                     | Red/White (5500-6300K) |                |          |

## LED Ceiling Light

This is ceiling Light with beautiful appearance and accent. This simple and stylish dome Light is pre-wired with an integral built-in mini on/off rocker switch. With weather proof design, this stylish ceiling light can be used normally in severe environment. It can be surface-mounted on any flat ceiling surface, simple and quick Installation. These lights are going to be a great addition to your RV, boat or even your room.



SFCL1-3-WW-01




SFCL1-3-YW-01



SFCL1-3-BW-01




Blister

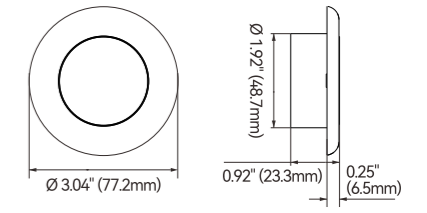

| Model         | Voltage | Wattage | Power    | Installation Method | Color Temperature       | Material |
|---------------|---------|---------|----------|---------------------|-------------------------|----------|
| SFCL1-3-WW-01 | 12V     | 1W      | 6 × 0.2W | Flush mount         | Cool White (5500-6300K) | PC White |
| SFCL1-3-YW-01 |         |         |          |                     | Warm White (2900-3200K) |          |
| SFCL1-3-BW-01 |         |         |          |                     | Bule                    |          |

## LED Ceiling Light

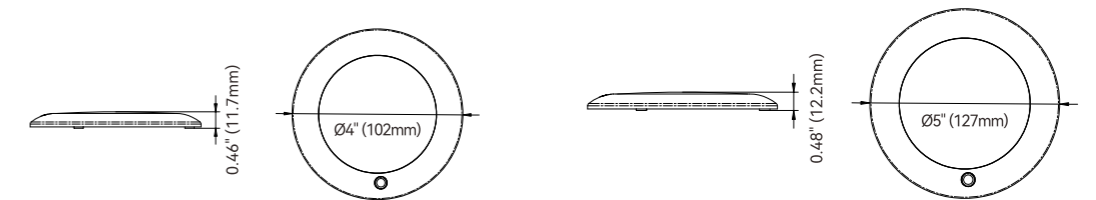

Blister



SFCL1-4-YW-04



SFCL1-4-WW-04



SFCL1-5-YW-04



SFCL1-5-WW-04


| Model         | Voltage | Wattage | Installation Method | Color Temperature       | Diameter   |
|---------------|---------|---------|---------------------|-------------------------|------------|
| SFCL1-4-YW-04 | 10-30V  | 4W      | Surface mount       | Warm White (2900-3200K) | 4" (102mm) |
| SFCL1-4-WW-04 |         |         |                     | White (5800-6300K)      |            |
| SFCL1-5-YW-04 | 10-30V  | 6W      | Surface mount       | Warm White (2900-3200K) | 5" (127mm) |
| SFCL1-5-WW-04 |         |         |                     | White (5800-6300K)      |            |

## LED Courtesy Light



| Model       | Voltage | Wattage | Power    | Installation Method | Color Temperature       |
|-------------|---------|---------|----------|---------------------|-------------------------|
| SFCL1-WS-04 | 12V     | 0.2W    | 1 × 0.2W | Flush mount         | Cool White (5500-6300K) |
| SFCL1-BS-04 |         |         |          |                     | Blue                    |
| SFCL1-YS-04 |         |         |          |                     | Warm White (2800-3200K) |
| SFCL1-CS-04 | 12V     | 0.2W    | 4 × 0.2W | Flush mount         | Multi-Color             |


## LED Oblong Courtesy Light

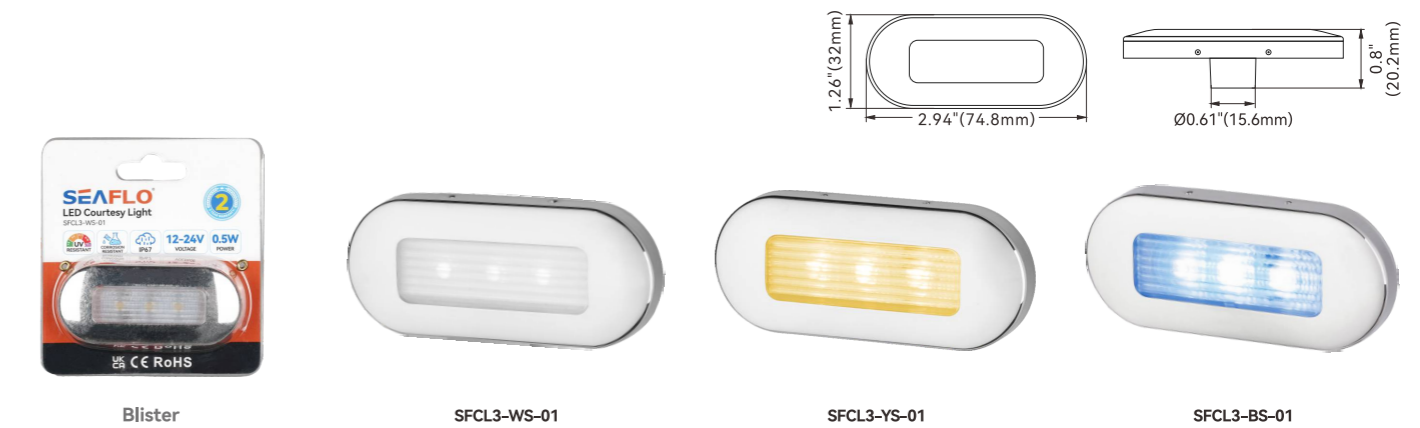

| Model       | Voltage | Wattage | Power  | Installation Method | Material             | Cool                    |
|-------------|---------|---------|--------|---------------------|----------------------|-------------------------|
| SFCL3-WS-01 | 12-24V  | 0.5W    | 3x0.2W | Flush mount         | S.S. 316 and PC base | Cool White (5500-6300K) |
| SFCL3-YS-01 |         |         |        |                     |                      | Warm White(2900-3200K)  |
| SFCL3-BS-01 |         |         |        |                     |                      | Blue                    |

## LED Courtesy Light

LED courtesy lights are versatile lighting solutions suitable for both daytime and nighttime use. They provide safe, reliable and energy efficient lighting for interior or exterior applications, effectively highlighting specific areas within your vessel.

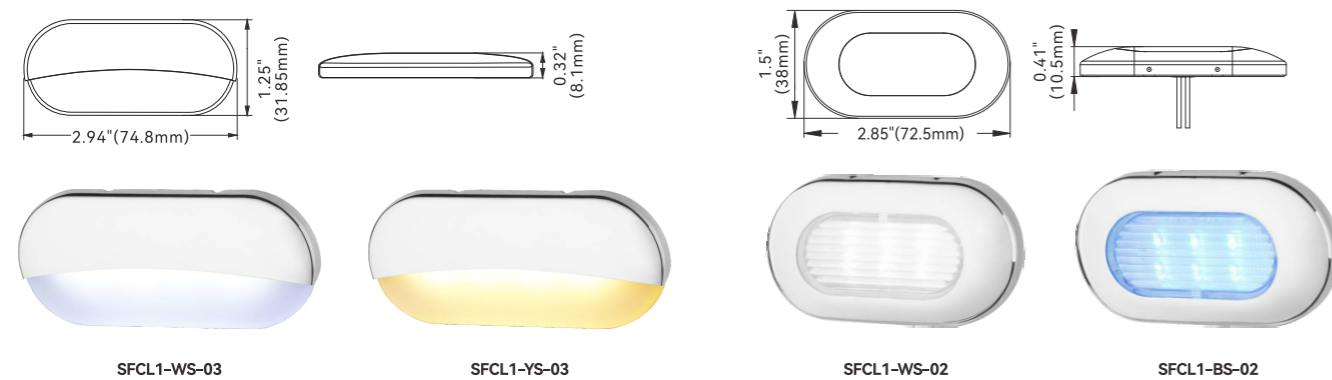

| Model       | Voltage | Wattage | Power  | Installation Method | Color Temperature      | Material           |
|-------------|---------|---------|--------|---------------------|------------------------|--------------------|
| SFCL1-WS-03 | 12V     | 0.4W    | 4x0.2W | Surface mount       | Cool White(5500-6300K) | PC+Stainless Steel |
| SFCL1-YS-03 |         |         |        |                     | Warm White(2800-3200K) |                    |
| SFCL1-WS-02 | 12V     | 1.2W    | 6x0.2W | Surface mount       | Cool White(5500-6300K) | S.S. 304           |
| SFCL1-BS-02 |         |         |        |                     | Blue                   |                    |

## LED Livewell Light

LED Livewell Light will illuminate your livewell and small utility area. Can be used above or below water level with through-wall mounting. IP68 waterproof, Completely sealed, power saving LED Livewell / Baitwell lamps are designed for installation into live bait tanks.




| Model       | Voltage | Wattage | Power  | Installation Method | Color Temperature      | Material |
|-------------|---------|---------|--------|---------------------|------------------------|----------|
| SFCL1-WB-05 | 12V     | 0.2W    | 1x0.2W | Flush mount         | Cool White(5500-6300K) | PC       |
| SFCL1-BB-05 |         |         |        |                     | Blue                   |          |
| SFCL1-WB-06 | 12V     | 0.2W    | 1x0.2W | Flush mount         | Cool White(5500-6300K) | PC       |
| SFCL1-WB-06 |         |         |        |                     | Blue                   |          |

## LED Reading Light

SEAFLO LED reading lamp is an elegantly stylish wall mounted LED interior lamp perfect for any vessel. The stainless steel or brass lacquered body offers a premium look and feel, while the unique constant friction mechanism offers adjustable swing and pitch to achieve optimum light angles, that won't need constant adjustment. The reading lamp is available in warm (2900K-3200k) which will beautifully enhance the materials chosen for your vessel.



Blister

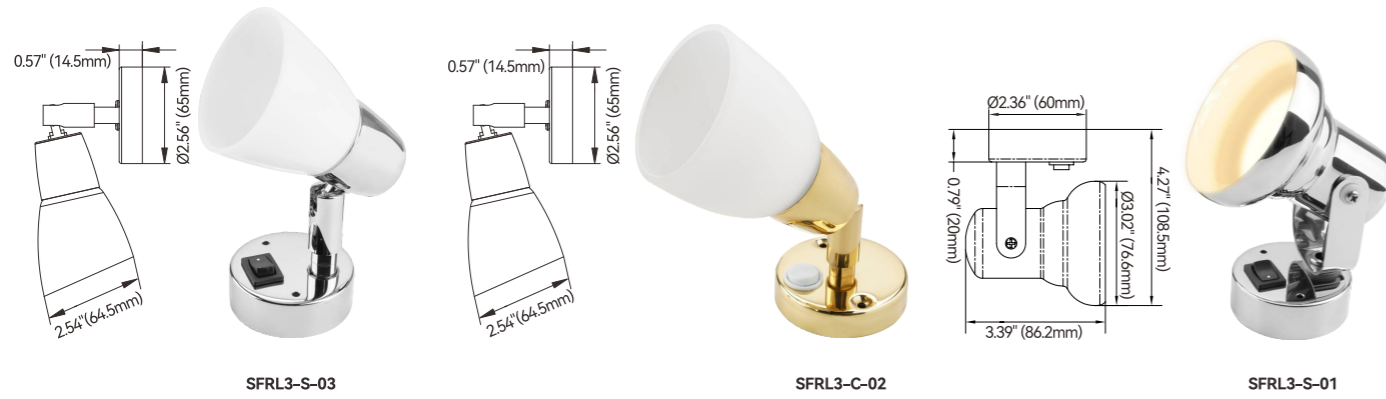


| Model      | Voltage | Wattage | Power  | Installation Method | Color Temperature       | Material        |
|------------|---------|---------|--------|---------------------|-------------------------|-----------------|
| SFRL3-S-03 | 8-30V   | 3.1W    | 1 × 3W | Surface mount       | Warm White              | Stainless Steel |
| SFRL3-C-02 |         |         |        |                     | Warm White              | Brass Lacquered |
| SFRL3-S-01 | 12V     | 3.1W    | /      | Surface mount       | Warm White (2900-3200K) | Stainless Steel |



**Stainless Steel or Brass Lamp Body**

Corrosion-resistant, no rust and no fading

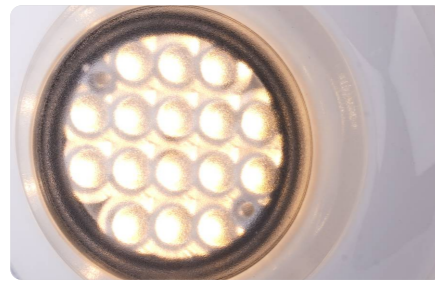

**Lamp Beads**

Lamp beads adopt high-power chips, high brightness, uniform light emission, and high color rendering index.



**Switch button**

Base There is a switch button at the bottom, and the heat dissipation design is added, and the heat dissipation performance is better.